

PowerLite[®] 3LCD Projectors for SMART Board[®] Interactive Whiteboards

Projectors

Education

PowerLite 580

XGA resolution
For SMART Board M680 and 880
77" maximum image size

PowerLite 585W

WXGA resolution
For SMART Board M685 and 885
87" maximum image size



PowerLite 585W for
SMART shown

SMART Board-compatible ultra short-throw projectors for the BYOD classroom.

Specially designed to work with SMART Board interactive whiteboards —

Easily connect and control your projector via the SMART Extended Control Panel (ECP)¹

Compatible with SMART Notebook[®] collaborative learning software and SMART Ink[®] tools



Large, engaging presentations, even in small spaces — ultra short throw distance saves space; minimal shadows and glare

Remarkable color accuracy — 3LCD, 3-chip technology delivers high Color Brightness and a wide Color Gamut

Look for two numbers:

3,200 to 3,300 lumens² Color Brightness for more accurate, vivid color
3,200 to 3,300 lumens² White Brightness for well-lit rooms

Incredible image quality — available in native XGA and WXGA resolution

Convenient collaboration for BYOD classrooms — wirelessly share³ and compare students' work from multiple devices, simultaneously, with Moderator device management software⁴

Manage projectors and present remotely — easy network connectivity; software included





All projected images simulated.

SMART Board-compatible projectors for the BYOD classroom.

Specially designed to work with SMART Board interactive whiteboards⁵, these bright, short-throw projectors offer the perfect choice for classroom collaboration. Featuring convenient wireless performance (wireless module sold separately) and long-lasting lamps, they provide the ease of use teachers want, plus the low total cost of ownership they need.

	PowerLite 530 for SMART V11H673320	PowerLite 580 for SMART V11H604320	PowerLite 585W for SMART V11H602320
Color Brightness ²	3,200 lumens	3,200 lumens	3,300 lumens
White Brightness ²	3,200 lumens	3,200 lumens	3,300 lumens
Resolution	XGA	XGA	WXGA
Throw Ratio	0.55, short throw	0.31, ultra short throw	0.27, ultra short throw

Projector replacements for existing SMART Board interactive whiteboards ¹				
	Short throw	Ultra short throw		
SMART Board interactive whiteboards	PowerLite 530 for SMART V11H673320	PowerLite 580 for SMART V11H604320	PowerLite 585W for SMART V11H602320	SMART Cable Adapter Kit ¹ (sold separately)
SBM680 (77")	●	●		●
SBM685 (87")			●	●
SB880 (77")	●	●		●
SB885 (87")			●	●
Replaces SMART models	UF70, UF75, UF65, U100	UF70, UF75, UF65, U100	UF70w, UF75w, UF65w, U100w, UX60, UX80	
Epson projector mount	Epson wall mount (ELPMB45); or adapter plate for SMART Mount arm is available (V12H870001)	Epson wall mount included with projector	Epson wall mount included with projector	

Epson projectors for new SMART Board all-in-one interactive whiteboard systems*			
	Short throw	Ultra short throw	
SMART Board interactive whiteboards	PowerLite 530 for SMART V11H673320	PowerLite 580 for SMART V11H604320	PowerLite 585W for SMART V11H602320
SBM680E (77")	●	●	
SBM685E (87")			●
SB880E (77")	●	●	
SB885E (87")			●

*SMART Board not included. SMART Boards are available through authorized SMART resellers and distributors.

Specially designed for SMART



SMART Extended Control Panel (ECP)¹.

Compatible with SMART Board interactive whiteboards.

Specifically designed to work with SMART Board interactive whiteboards⁵, these projectors support the SMART Extended Control Panel (ECP)¹, which means you can control projector power, volume and input selections from your board. When bundled with a compatible SMART Board (sold separately), this integrated solution offers SMART Notebook collaborative learning software, plus SMART Ink tools, which allow teachers to create engaging and interactive learning experiences. Make learning fun with SMART Notebook's subject-specific functionality, easy integration with mobile devices, and thousands of pieces of pre-created content.



Amazing image quality



Voted #1 in Image Quality⁶.

Epson 3LCD projectors deliver remarkable color accuracy. For more accurate color, you need both high color brightness (color light output) and a wide range of color (color gamut).

Color brightness is the number of lumens displayed when projecting color.

Traditional lumens specifications only measure white brightness, so look for two separate brightness measurements.

Color gamut is the range of colors a projector is capable of reproducing. When the color gamut of a projector is small, colors will be displayed far less accurately.

Specifications

Projection System 3LCD, 3-chip technology
Projection Method Front/rear wall mount
Driving Method Poly-silicon TFT Active Matrix
Pixel Number
 580: 786,432 dots (1024 x 768) x 3
 585W: 1,024,000 dots (1280 x 800) x 3
Color Brightness² Color Light Output
 580: 3,200 lumens
 585W: 3,300 lumens
White Brightness² White Light Output
 580: 3,200 lumens
 585W: 3,300 lumens
Aspect Ratio
 580: 4:3
 585W: 16:10
Native Resolution
 580: 1024 x 768 (XGA)
 585W: 1280 x 800 (WXGA)

Resize

640 x 580 (VGA), 800 x 600 (SVGA), 1024 x 768 (XGA/585W only), 1152 x 864 (SXGA), 1280 x 800 (WXGA/580 only), 1280 x 960 (SXGA2), 1280 x 1024 (SXGA3), 1280 x 768 (WXGA 60-1/580 only), 1360 x 768 (WXGA 60-2), 1440 x 900 (WXGA+), 1400 x 1050 (SXGA+), 1600 x 900 (WXGA++)

Lamp Type 245 W UHE

Lamp Life⁷

Up to 6,000 hours (ECO Mode)
 Up to 4,000 hours (Normal Mode)

Throw Ratio Range

580: 0.31 – 0.42
 585W: 0.27 – 0.37

Size (projected distance)

580: 55.9" to 93.2" (0.348 to 0.597 m)
 585W: 60" to 100" (0.348 to 0.597 m)

Keystone Correction Manual Vertical ± 3 degrees

Keystone Correction Manual Horizontal ± 3 degrees

Mac[®] Connectivity

Projector is Mac compatible via USB, DVI to HDMI[®] or VGA adapter (not included), DP to HDMI or VGA

Contrast Ratio Up to 10,000:1

Color Reproduction Up to 1.07 billion colors

Projection Lens

Type No optical zoom/Manual focus

F-number 1.80

Focal Length 3.71 mm

Zoom Ratio Digital zoom 1.0 – 1.35

Interfaces

Computer/component video: D-sub 15 pin x 2
 S-video: Mini DIN x 1
 Composite video: RCA (Yellow) x 1
 Audio in: RCA x 1 (L and R), Mini stereo x 2
 USB (Type B) connector x 1 (USB display, audio and mouse control)
 USB (Type A) connector x 1 (USB memory/document camera)
 HDMI x 2 (1 MHL[®])
 RJ-45 x 1
 Serial: RS-232c x 1
 Monitor out: D-sub 15 pin x 1
 Audio out: Mini stereo x 1
 Microphone: Mini stereo x 1
 Wireless LAN port: 802.11 b/g/n (optional – module sold separately)

Other

Display Performance NTSC: 480 lines, PAL: 576 lines (Depends on observation of the multi-burst pattern)

Input Signal NTSC/NTSC4.43/PAL/M-PAL/N-PAL/PAL60/SECAM

Speaker 16 W (mono)

Operating Temperature 41 ° to 95 °F (5 ° to 35 °C)

Power Supply Voltage 100 – 240 V ± 10%, 50/60 Hz

Power Consumption

376 W (Normal Mode), 280 W (ECO Mode)

4.3 W Standby (Communication On)

0.33 W Standby (Communication Off)

Fan Noise

35 dB (Normal Mode)

28 dB (ECO Mode)

Security Kensington-style lock provision, padlock and security cable hole, password protect function

Dimensions (W x D x H)

Including Feet 14.4" x 14.8" x 7.6"

Excluding Feet 14.4" x 14.8" x 6.1"

Weight 11.7 lb

Remote Control

Features Source search, video, LAN, computer, USB, power, aspect, color mode, volume, e-zoom, A/V Mute, freeze, menu, page up and down, help, auto, mouse functions, user, esc


Operating Distance Front/rear: 19.7 ft (6 m)

Eco Features

RoHS compliant

Recyclable product⁸

Epson America, Inc. is a SmartWay[®] Transport Partner⁹

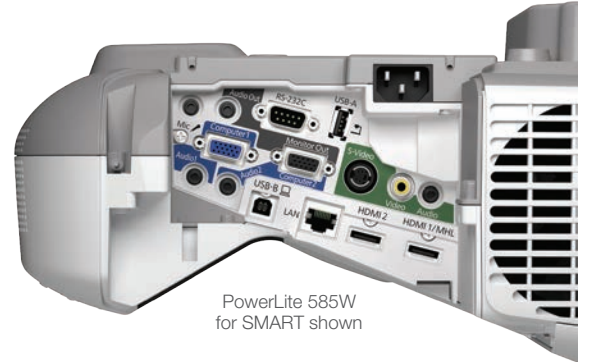

PowerLite 585W for SMART shown

Support

Epson ConnectionSM

Pre-sales support: U.S. and Canada 800-463-7766
www.epson.com

Service Programs

Two-year projector limited warranty, Epson Road Service program, PrivateLine[®] dedicated toll-free support and 90-day limited lamp warranty

What's in the Box

PowerLite 580 or 585W projector for SMART, wall mount, 15' power cord, projector remote control, batteries, user manual CD, projector software CDs, Quick Setup Sheet, installation guide, template sheet, null modem serial cable

Ordering Information

PowerLite 580 for SMART	V11H604320
PowerLite 585W for SMART	V11H602320
Genuine Epson lamp 580/585W	V13H010L80
Replacement air filter	V13H134A40
PowerLite Pilot [™] 2 (ELPCB02)	V12H614020
Active speakers (ELSP02)	V12H467020
Wireless 802.11 b/g/n LAN unit (ELPAP07)	V12H418P12
Quick wireless connection USB key (ELPAP08)	V12H005M08
Epson DC-06 document camera (ELPDC06)	V12H321005
Epson DC-12 document camera (ELPDC12)	V12H594020
Epson DC-21 document camera (ELPDC21)	V12H758020

¹ Existing SMART Board M680, 880, M685 and 885 installations require the SMART Cable Adapter Kit (SKU: SBPOWER-UGK-NA, Retrofit Kit, SMART Projector to Epson Projector). SMART Accessories must be purchased directly from authorized SMART dealers or from Gilmore Parts store, (800) 795-6661 or www.gilmore.ca/smartparts | ² Color brightness (color light output) and white brightness (white light output) will vary depending on usage conditions. Color light output measured in accordance with IDMS 15.4; white light output measured in accordance with ISO 21118. | ³ For wireless functionality, including via the Epson iProjection[™] App, the projector must be configured on a network, either through the Ethernet port on the projector (check model specifications for availability) or via a wireless connection. Check your owner's manual to determine if a wireless LAN module must be purchased separately to enable a wireless connection. Not all Epson projectors are able to be networked. The Epson iProjection App does not support all files and formats. See www.epson.com for details. | ⁴ Moderator feature is part of EasyMP[®] Multi-PC Projection software. | ⁵ The PowerLite 530 for SMART and PowerLite 580 for SMART are compatible with SMART Board M680 and 880 interactive whiteboards and the PowerLite 585W for SMART is compatible with SMART Board M685 and 885 interactive whiteboards. | ⁶ Based on TFCinfo: U.S. Projector Brand Customer Perception and Preference Study, Multimedia Projectors 2017. | ⁷ Lamp life will vary depending upon mode selected, environmental conditions and usage. Lamp brightness decreases over time. | ⁸ For convenient and reasonable recycling options, visit www.epson.com/recycle | ⁹ SmartWay is an innovative partnership of the U.S. Environmental Protection Agency that reduces greenhouse gases and other air pollutants and improves fuel efficiency.

Learn more about how our products can empower your institution. Visit us at www.epson.com/foreducation

Better Products for a Better Future[™]
eco.epson.com



Epson America, Inc.
 3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada Limited
 185 Renfrew Drive, Markham, Ontario L3R 6G3

www.epson.com
www.epson.ca

Specifications and terms are subject to change without notice. EPSON, EasyMP and PowerLite are registered trademarks, EPSON Exceed Your Vision is a registered logomark and Better Products for a Better Future and Epson iProjection are trademarks of Seiko Epson Corporation. PrivateLine is a registered trademark, Pilot is a trademark and Epson Connection is a service mark of Epson America, Inc. Mac is a trademark of Apple Inc., registered in the U.S. and other countries. SmartWay is a registered trademark of the U.S. Environmental Protection Agency. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. Copyright 2019 Epson America, Inc. Com-SS-Oct-13 CPD-51974R2 1/19

Contact:

