

EB-720 EB-725W EB-725Wi EB-735Fi

EB-750F EB-755F Release Notes

Version 2.41

1. Feature improvement

Option to select whether to allow interruptions for secondary connections, even when the access permission setting is off. In firmware V2.40 the "Interrupt Connection" menu was changed, but it has now changed again to the specification for users who want to continue using the previous function.

2. Bug Fixes

In rare cases, the following issues may occur when changing network settings after connecting via Miracast. Both issues can be resolved by turning the power on/off. - When Auto Source Search is set to Off Event ID 0029 is displayed on the Miracast source, and Miracast connection becomes impossible. - When Auto Input Detection is set to On The screen goes black, and only the power button is active

Version 2.40

1. Security update

Countermeasures against a Brute-force attack.

If the password ("Remote Password", "Web Control Password", "Monitor Password") is incorrect when connecting to the projector using a web browser or ESC/VP.net, access from the same IP address will be restricted for 2 seconds.

2. Feature improvement

Tamper Prevention - Projection Confirmation Dialog

When a device connects, a confirmation message for connection permission will appear on the projection screen.


Select "Yes" to project or Select "No" to close the dialog.

If "Add to Block List" is selected, the device will be added to the block list.

- Removed the "Interrupt Connection*" menu.

"Interrupt Connection" will be replaced with the following two options: "Access Control" and "Secondary Connections."

*Network Settings > Network Projection > Interrupt Connection

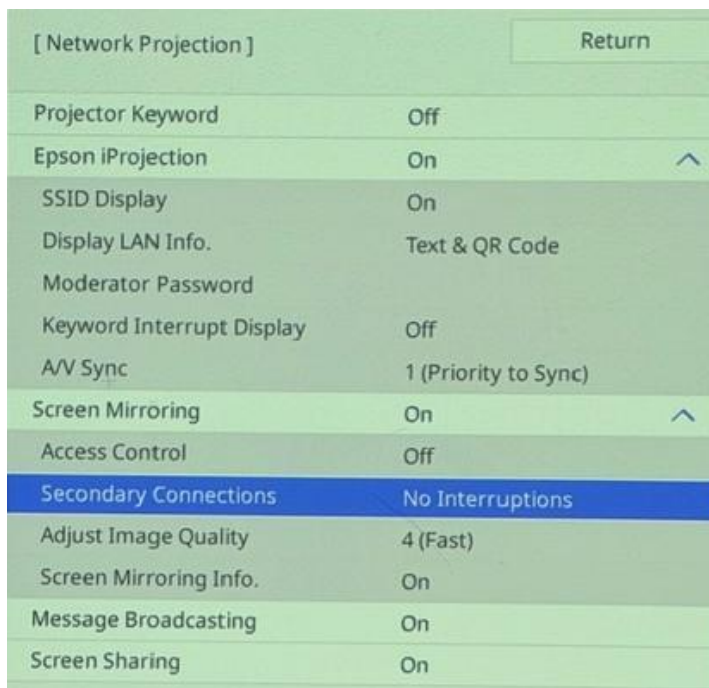

| [Network Projection] | | Return |
|------------------------------|-------------------------|--------|
| Projector Keyword | Off | |
| Epson iProjection | On | ^ |
| SSID Display | On | |
| Display LAN Info. | Text & QR Code | |
| Moderator Password | | |
| Keyword Interrupt Display | Off | |
| A/V Sync | 1 (Priority to Sync) | |
| Screen Mirroring | On | ^ |
| Access Control | Off | |
| Secondary Connections | No Interruptions | |
| Adjust Image Quality | 4 (Fast) | |
| Screen Mirroring Info. | On | |
| Message Broadcasting | On | |
| Screen Sharing | On | |

- Added "Access Control" menu setting

Under "Access Control", you can change whether the above "Projection Confirmation Dialog" is displayed.

- Added "Secondary Connections" menu setting

Under "Secondary Connections", you can change the setting for when a second device connects.

If "No Interruptions" is selected, you can use Screen Mirroring2.

- Added Block List Deletion Function

If there are devices on the block list, you can delete them from the standby screen and Home screen.

On the standby screen, pressing Enter will display a confirmation message for deleting the block list.

(If there are no entries on the block list, the removal prompt will not be displayed.)

The block list removal icon will be displayed on the Home screen.

- Added Forced Disconnection Feature

A feature has been added to forcefully disconnect while using Screen Mirroring.

Press and hold the Esc button to switch back to the projection screen.

3. Bug fixes

1) Crestron Connected V2 may become unusable when starting up the projector after updating the projector's firmware.

*If this issue occurs, restart the projector to restore functionality.

2) Finger touch function may work even when the finger touch unit was not connected (Finger touch unit's power was OFF or the touch unit was not connected).

Version 2.38

Feature Improvements

1) Disables the H.265 codec when using Screen Mirroring because it is not supported by the projector.

2) Support for USB Display Ver.1.83 (Win/Mac)

3) Implemented a countermeasure where jagged line draw when using the interactive pen, when trying to draw a straight line.


- When trying to draw a straight line with the pen, the line may be jagged or broken, or the toolbox may suddenly appear.

- At times unplugging the projector's power for 5 minutes or more may resolve the issue, but at times the issue is still not resolved.

To turn on the countermeasure for these symptoms, perform the following steps:

Step 1. Select [Pen/Touch] - [PC Interactivity] - from the projector's menu.

- Hold down the right direction button on the remote for 5 seconds or more until you hear one beep. The beep verifies the countermeasure is ON.

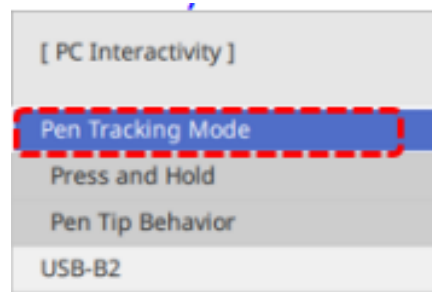


To turn off the countermeasure:

- Select [Pen/Touch] - [PC Interactivity] - [USB-B2] from the projector's menu.

- Hold down the right directional button on the remote for 5 seconds or more until you hear one beep. This verifies the

countermeasure is OFF.

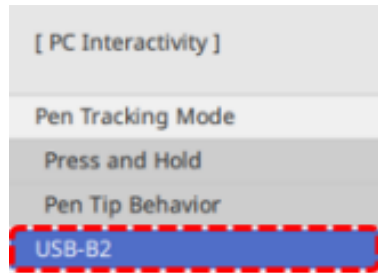

To verify the countermeasure for Jagged lines is ON/OFF setting

- Select [Pen/Touch] - [PC Interactivity] from the projector's menu. - Hold down the right directional button for 5 seconds or more. - You'll know it's set to ON when you hear one beep. - You'll know it's set to OFF when you hear two beeps.

