

Independent Displays

About this Guide

This guide consists of 2 sections:

- **Overview** – A detailed description of what the Independent Displays configuration does.
- **How to Configure** – A procedure to be followed within any KDS Setup. This guide assumes that you have a KDS already setup as described by the Epson KDS Quick Start Guides.

This guide is relevant for:

KDS FW: **v2.50 and above**

KDS Utility (Windows): **v2.5.0.0 and above**

Overview

The **Independent Displays** configuration option allows items in an order to be treated independently from other same items in the order when those items are sent to different displays. If a Hamburger is sent to station 1, and the same Hamburger is sent to station 2, then they are not matched by the KDS and are considered different Hamburgers. Bumping from station 1 will not cause the Hamburger to be crossed out on station 2.

Note: This ability (option) is only selectable when the KDS is configured for POS Menu Routing.

0 4 Grill Station 1 Wed Ma		0 4 Grill Station 2 Wed Ma	
1 Stephanie Smith Tbl 1 CK# 0703 00:20	2	1 Stephanie Smith Tbl 1 CK# 0703 00:24	2
1 Classic Hamburger		1 Classic Hamburger	
Pickles		Pickles	
Tomatoes		Tomatoes	
Onions		Onions	
Lettuce		Lettuce	
Mustard		Mustard	
1 Classic Hamburger		1 Classic Hamburger	
Lettuce		Lettuce	
Mustard		Mustard	

Figure 0.1 – Same item sent to 2 different stations are handled independently.

How to Configure

Step 1: Enable “Independent Displays” Function.

1. Select “**Setup**”.
2. Select “**Site Wide Settings**”
3. Ensure “**POS Menu Routing**” is enabled.
4. Ensure “**Independent Displays**” is checked.
5. Click “**Apply KDS Settings**”.

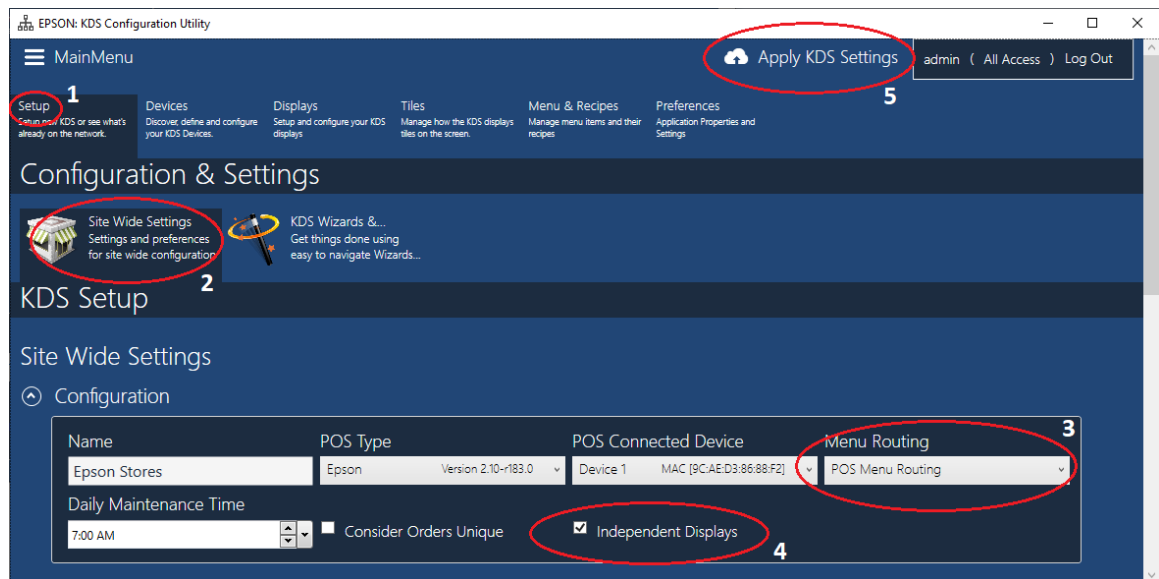


Figure 1.1 – Enabling “Independent Displays” Function