

Mirrored Display



About this Guide

This guide consists of two sections:

- **Overview** - A brief description of what a mirrored display is in a TrueOrder™ Kitchen Display System (KDS).
- **Configure Mirrored Displays** - A procedure that can be followed to configure this in a Multi-Station KDS system.

Overview

A Mirrored Display is a station that shows the exact same information as another station. Bumping from one station/display will show the item bumped off and removed from its mirrored station(s) too.

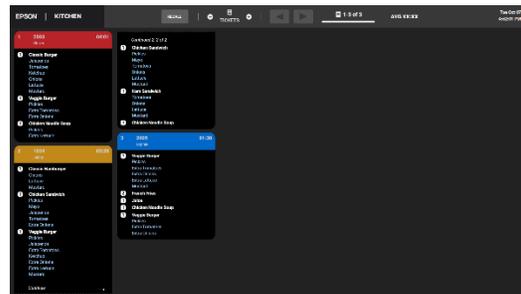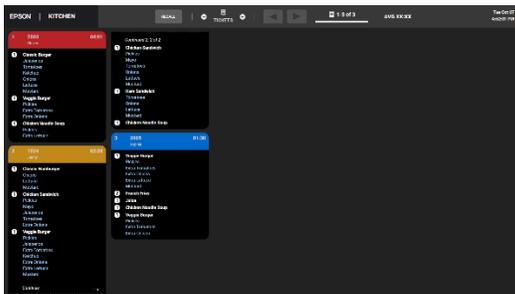


Configure Mirrored Displays


This guide assumes that you already have a 2 Station KDS system setup as described in the TrueOrder KDS Multi-Station Quick Start Guide. The following procedures will create a mirrored station of the Kitchen station. This results in a 3 Station KDS.

Add a New Device:


1. Select **Stations** from Menu header.
2. Click **Device Config**.
3. Search for Device in Find Device box.

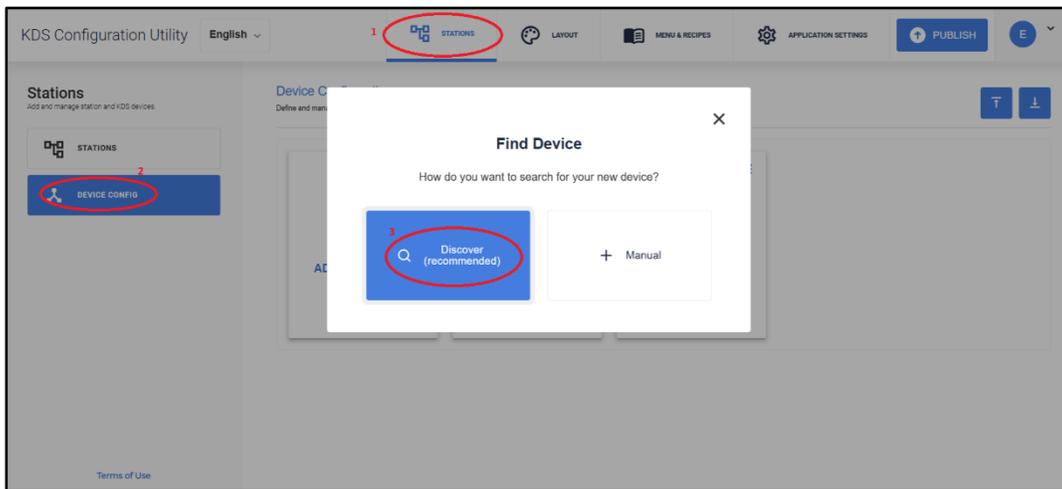

4. Select a device from the list of devices discovered on the network.

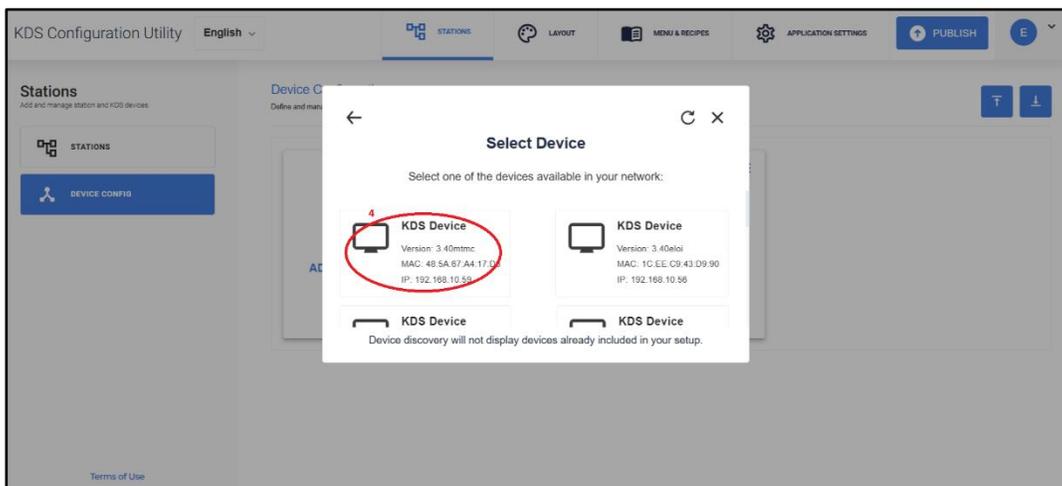


5. Name **Device** (e.g., Kitchen_Mirror).
6. Click **Save**.

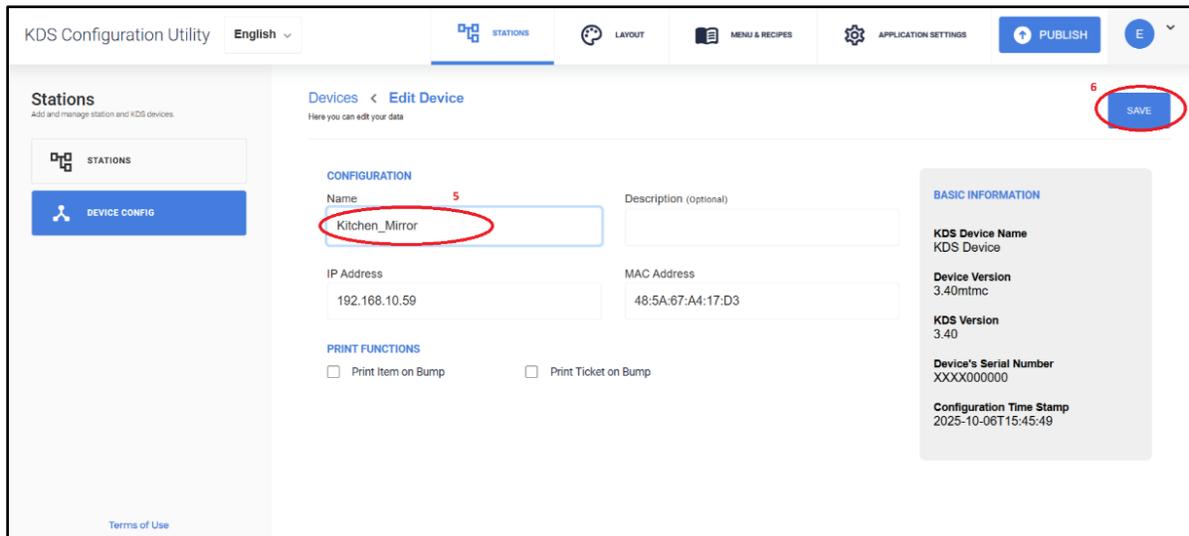


Create the Mirrored Station:

7. Click **Stations**.
8. Click drop down menu icon  on the Kitchen Station.
9. Click **Mirror**.

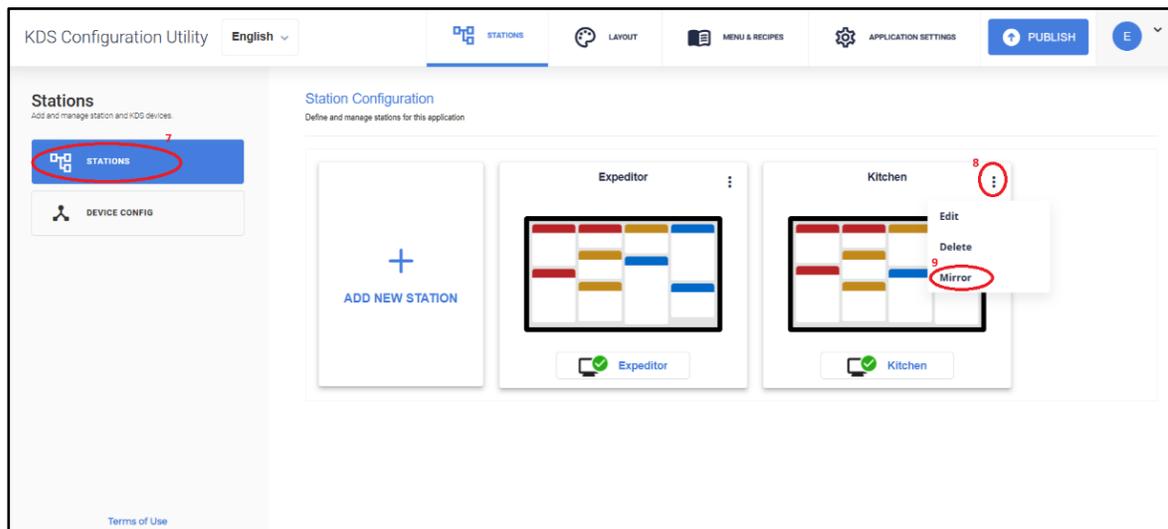

10. Select the recently added **Kitchen_Mirror** device.
11. Click **Confirm**.

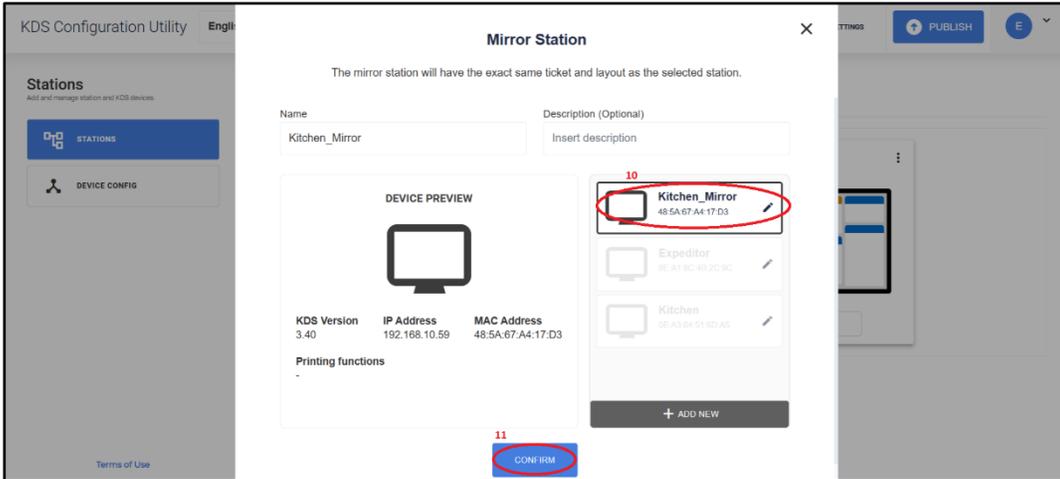

12. Click **Publish**. All 3 KDS screens should reload their new configuration.

