

# KDS Menu Routing


## About this Guide

This guide consists of 2 sections:

- **Overview-** A detailed description of what KDS Menu Routing is and its functionality in a TrueOrder™ Kitchen Display System (KDS).
- **How to Configure KDS Menu Routing –** A procedure that can be followed to configure this in a Multi-Station KDS system.

## Overview

In KDS Menu routing all print jobs are sent directly from the POS to a single KDS device (Master Device). The menu configuration and routing determine which displays the orders are sent to. In Figure 1 the Master Display gets the full order, then shows only grill items while routing the French Fries to the Fry station.

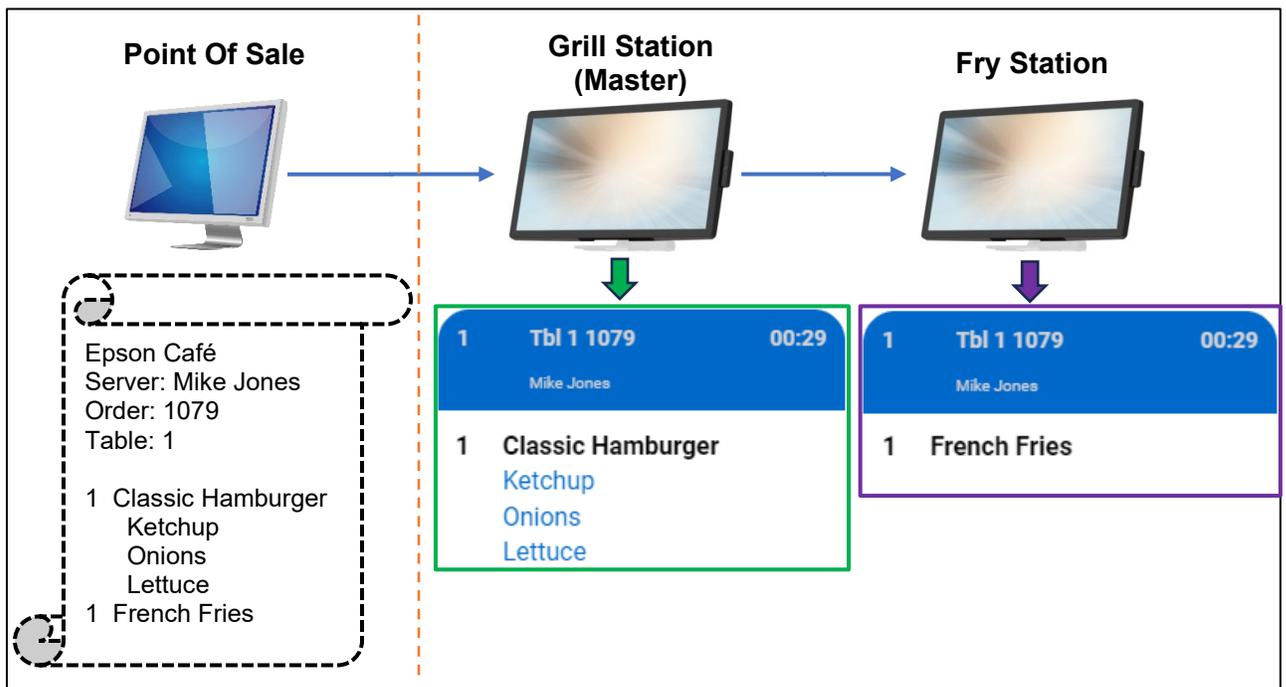


**Figure 1: KDS Menu Routing**

# How to Configure KDS Menu Routing

This guide assumes that you already have a 2 Station KDS system setup as described in the TrueOrder KDS Multi-Station Quick Start Guide.


## 1. Configure Site Wide Settings

1. Select the **Application Settings** tab.
2. Select **Side Wide** from the left-hand side menu.
3. Select **POS Connected Device**.
4. Select **KDS Menu Routing** from the drop-down menu.

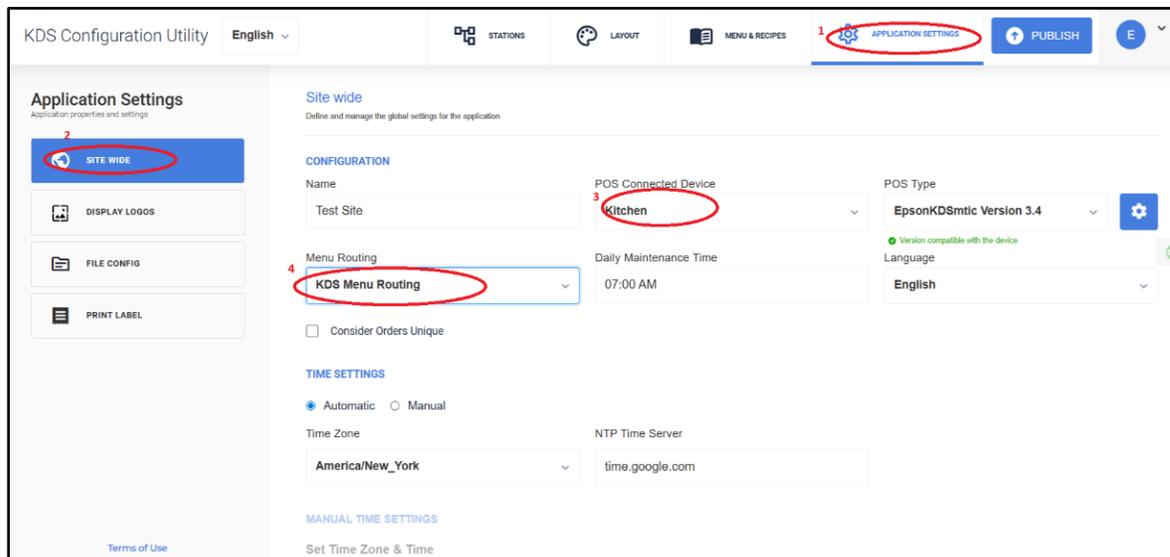


## 2. Configure Menu Items and Groups.

Please consult the KDS Menu and Recipes Quick User Manual for more details about how to configure a menu.

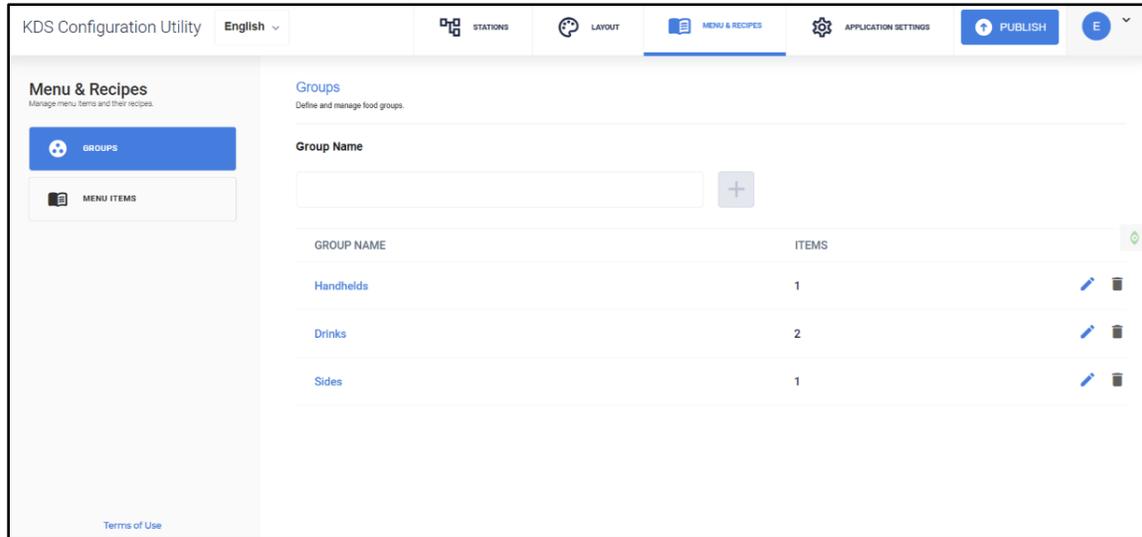


## 3. Configure the Menu Items for your Displays.


1. Click **Layout**.
2. Select **Grids**.
3. Select the Layout you want to configure (e.g. **Kitchen**).

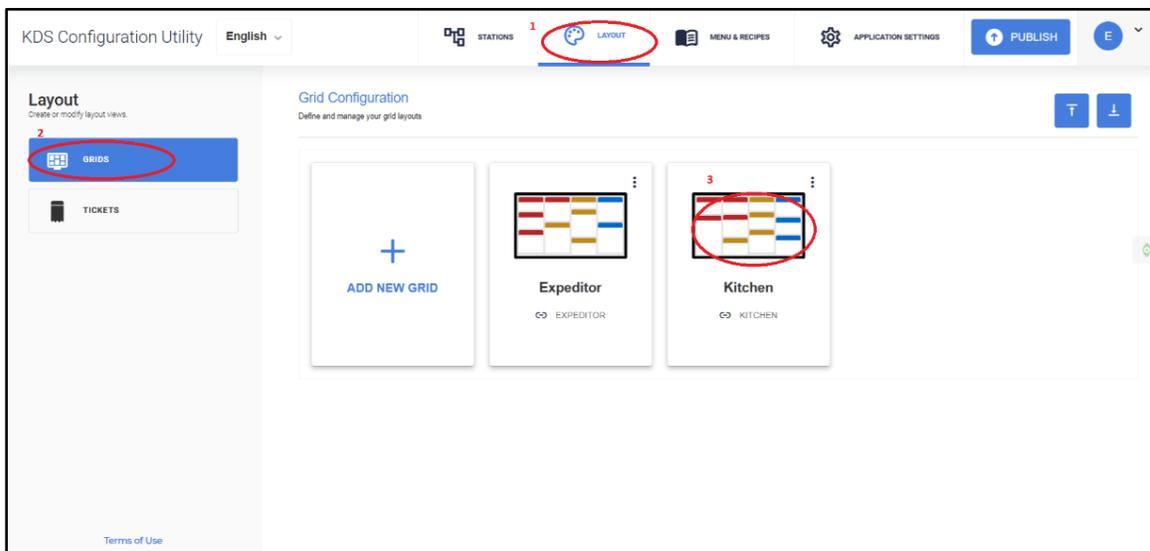

4. Click **Actions**.
5. Enable the **Menu Items Filter**.
6. Select the **Menu Items** you want shown on that Display.
7. Click **Save**.

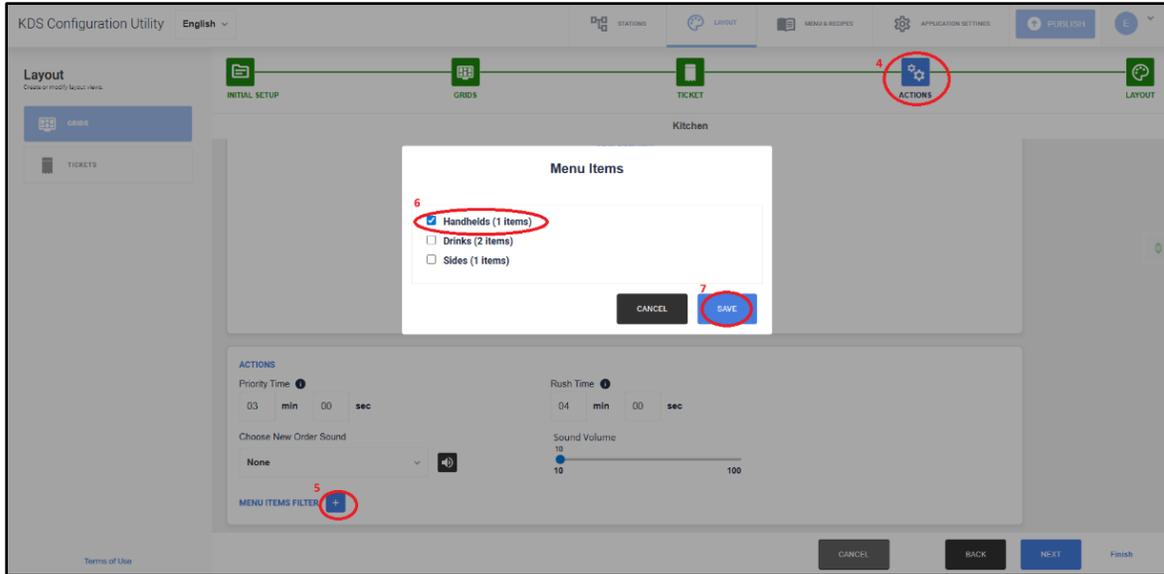

8. Select Menu Item/s to display.
9. Click **Finish**.

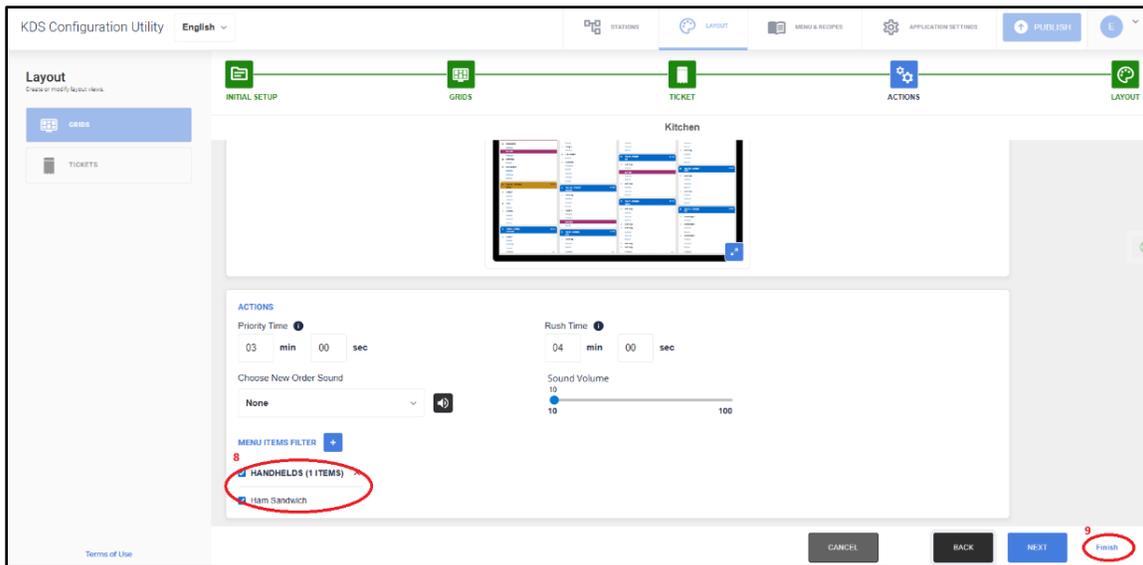

10. Click  to publish settings.