



Epson PowerLite® 61p

A versatile performer at the top of its class.

With a host of high-performance features, the Epson PowerLite 61p is the ideal solution for virtually any presentation. Its flexible connectivity, plus powerful 5 watt audio make this SVGA unit perfect for any classroom or board room.

Epson high-aperture LCDs work with its brilliant 2000 ANSI lumens to deliver accurate color, superior color saturation and remarkable image quality in any setting. And, with four input connections, plus automatic source selection, setup and operation couldn't be easier! Just plug it in, and you're presenting within seconds.

With whisper-quiet operation, unbeatable reliability and a convenient carrying case, the Epson PowerLite 61p ensures quality presentations that really make the grade.

Ultra bright 2000 ANSI lumens for presentations in any setting

- Works great in large conference rooms and classrooms

Superior image quality and performance

- Three Epson high-aperture LCDs for greater color depth and color accuracy
- SVGA (800 x 600) resolution for sharp, vivid images

Easy setup and operation

- Color-coded cables make setup a breeze
- Audible power-on and -off beeps respond to user commands
- Quick start-up time avoids presentation delays and reduces presentation jitters
- Source search function automatically displays the connected input source(s) and switches instantly between various sources
- +/-15° digital keystone correction automatically engages without manual adjustments
- Optical zoom lens for flexible placement and positioning
- Monitor out capability to display images on a monitor and screen simultaneously
- Password-protected security features, plus operation lock prevent against unauthorized use
- Full-featured remote control, including mouse emulation functions and an electronic pointer for complete presentation control
- Soft carrying case included

Great audio and connectivity

- Powerful 5W audio so there's no additional audio expense
- Audio out (audio follow-through)
- No costly expansion modules needed; two computer and two video inputs with dedicated audio for each

- Third-party network monitor and control management capabilities via the RS232C port

State-of-the-art video performance

- Two video inputs for composite, component (optional cable required), and S-video compatibility
- HDTV-ready; supports 480i, 480p, 720p, and 1080i formats

Quiet and unobtrusive


- Whisper-quiet operation (36db/30db) ensures the presentation is the center of attention
- Cooling fan located in front for a comfortable viewing experience
- Lamp and air filter access on top of the projector for easy changes, even when the projector is ceiling mounted

Outstanding Epson service and support (free for the duration of the two-year warranty)

- 90-day lamp warranty for added dependability
- Epson Road Service program provides a replacement projector, typically within 24 hours
- Epson PrivateLineSM dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday – Friday (Calls are answered live, typically in about a minute.)
- International warranty in over 45 countries, exclusively from Epson



Front View

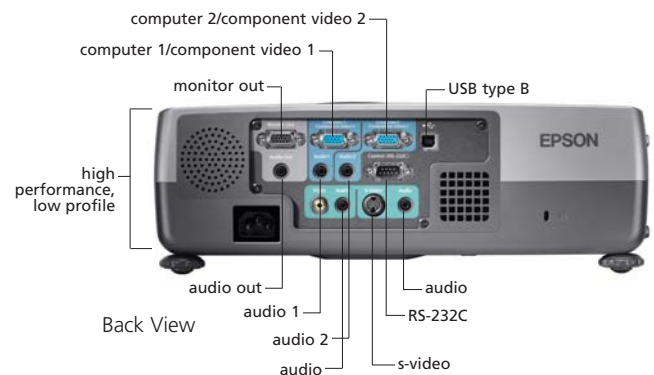

Back View

Epson PowerLite 61p Specifications

| | |
|--|---|
| Projection System | Epson original LCD technology |
| Projection Method | Front/rear/ceiling mount |
| LCD | |
| Size | 0.7" |
| Driving method | Epson High Temperature Poly-Silicon TFT |
| Pixel number | 480,000 dots x 3 (800 x 600) LCDs |
| Native resolution | SVGA |
| Aspect ratio | 4:3 (supports 16:9, 5:4) |
| Pixel arrangement | Stripe |
| Projection Lens | |
| Type | Manual: zoom / focus |
| F-number | 1.70 – 1.87 |
| f-number | 21.3 – 25.6mm |
| Zoom ratio | 1.0:1.2 |
| Lamp | |
| Type | 200W UHE |
| Life* | 2000H (High Brightness), 3000H (Low Brightness) |
| Screen Width Ratio (Distance/width) | 1.44 to 1.76:1 |
| Screen Size (Projected distance) | 30" to 300" (2.9' to 35.4') |
| Keystone Correction | Vertical: +/-15° Auto Keystone Correction |
| Brightness (Typical) | 2000 ANSI lumens (High Brightness) 1500 ANSI lumens (Low Brightness) |
| Contrast Ratio (High brightness) | 400:1 |
| Brightness Uniformity (Typical) | 85% |
| Color Reproduction | 24 bit; 16.7ml |
| Audio Output | 5W Monaural |
| Operating Temperature | 41°F to 95°F (5°C to 35°C) |
| Power Supply Voltage | 100-240VAC +/-10%, 50/60Hz |
| Power Consumption | 280W/5W at sleep mode |
| Dimensions | 10.7" x 13.8" x 4.3" |
| Weight | 8.9lb/4.0kg |
| Fan Noise | 36db (High Brightness), 30db (Low Brightness) |
| Effective Scanning Frequency Range | |
| Pixel clock | 13.5MHz to 230MHz |
| Horizontal | 15KHz to 107KHz |
| Vertical | 50Hz to 120Hz |
| Remote Control | |
| Features: | Source selection, power, page up/page down, color mode, volume, e-zoom, a/v mute, freeze, resize, menu, help, pointer |
| Operating Angle: | Right/Left +/- 30 degrees |
| Operating Distance: | Upper/Lower +/- 15 degrees 20 ft (6m) |
| RGB | |
| Analog RGB I/O | |
| Display performance | |
| Native | 800 x 600 |
| Resize | 1280 x 1024, 1024 x 768, 640 x 480, |
| Input terminal | |
| Video | Mini D-sub 15 pin x 2 |
| Audio | Stereo mini jack x 2 |
| Output terminal | |
| Video | Mini D-sub 15pin (monitor out) |
| Audio | Stereo mini-jack |

*Lamp life results will vary depending upon mode selected, environmental conditions, and usage.

| | |
|---------------------|---|
| Video I/O | |
| Display performance | NTSC: 560 lines PAL: 560 lines (Depends on observation of the multi burst pattern) |
| Input signal | NTSC, NTSC4.43, PAL, M-PAL, N-PAL, PAL60, SECAM HDTV: 480i, 480p, 720p, 1080i |
| Input terminal | |
| Video | Composite Video: RCA (Yellow) x 1; S-Video: Mini DIN; Component Video: Mini D-sub 15pin (in common with Analog RGB connector); Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector) |
| Audio | Stereo mini jack x 2 |
| Audio signal | 500m Vrms/47Kohm |
| Control I/O | |
| I/O terminal | USB connector series B x 1 (for mouse, keyboard) Serial: Mini D-sub 9 pin x 1, RS-232C |
| Security | |
| | Kensington®-style lock provision |

| | |
|--|--|
| Supplied Accessories | |
| Power cable, remote control with battery, computer cable, audio adapter cable, USB A/USB B cable, Start Here Kit, soft carrying case | |

| | |
|---|--|
| Warranty | |
| Two-year limited warranty, 2-year international warranty, 90-day lamp warranty, Epson Road Service Program and Epson PrivateLine dedicated toll-free support (U.S. and Canada only) | |

| | |
|---|------------|
| Product/Accessory Part Numbers | |
| Epson PowerLite 61p projector | V11H158020 |
| Replacement lamp | V13H010L30 |
| Air filter set | V13H134A06 |
| Samsonite wheeled soft case | ELPKS35 |
| ATA molded hardshell case | ELPKS51 |
| Ceiling mount | ELPMB36 |
| Suspension adapter | ELPMBAPL |
| False ceiling plate | ELPMBFCP |
| Security bracket/cabling for gyro lock mounts | ELPMBSEC |
| Adjustable ceiling channel | ELPMBACC |
| Component video cable | ELPKC19 |
| S-Video cable | ELPSV01 |
| Distribution amplifier | ELPDA01 |
| Mac adapter set | ELPAP01 |
| 50" portable screen | ELPSC06 |
| 60" portable pop-up screen | ELPSC07 |
| 80" portable pop-up screen | ELPSC08 |
| 83.6" hanging pull-down screen | ELPSC09 |
| Kensington security lock | ELPSL01 |
| High-Resolution Document Imager (ELPDC05) | V12H162020 |
| High-Resolution Document Camera (ELPDC04) | V12H064020 |

| | |
|--|---------------|
| Support-The Epson ConnectionSM | |
| Pre-Sales Support U.S. and Canada | 800-463-7766 |
| Automated Technical Support | 800-922-8911 |
| Internet Web Site | www.epson.com |

| | |
|---------------------------------------|----------------------|
| Presenters ONLINESM | presentersonline.com |
|---------------------------------------|----------------------|

EPSON[®]

Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
3771 Victoria Park Avenue, Toronto, Ontario M1W 3Z5

Specifications and terms are subject to change without notice. Epson is a registered trademark of Seiko Epson Corporation. PowerLite is a registered trademark, and Epson Connection, PrivateLine and Presenters Online are service marks of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks.
© Copyright 2004 Epson America, Inc. CPD-18006 15K 4/04 WP