



EPSON PowerLite® 7800p

Portability with a twist

Weighing just 12.1 lb, the EPSON PowerLite 7800p provides remarkable power and an expansive feature set. This high-performance portable boasts 3500 ANSI lumens, XGA resolution, and a 700:1 contrast ratio for brilliant image quality. In addition, state-of-the-art EasyManagement™ technology offers out-of-the-box networking capabilities. IS personnel will appreciate its easy network monitoring, maintenance and control.

A versatile performer, the EPSON PowerLite 7800p includes monitor out capability, extraordinary video performance, and a preview function for easy switching between sources. Bright enough for installation, and light enough to carry, this model also offers vertical and horizontal keystone correction, QuickCorner™ image correction, and WallShot™ for color correction.

Convenient networking capability with EasyManagement technology

- Built-in Ethernet port
- Projector monitoring, maintenance and control over the LAN
 - Check power status, lamp hours, etc.
 - Turn the projector on and off remotely
- Simple Network Management Protocol (SNMP)—for easy network management
- Email notification via SMTP to alert issues related to temperature, fan and lamp

Ultra bright 3500 lumens, weighs only 12.1 lb

- Remarkable brightness that's great for classrooms or conference rooms

Superior detail and razor-sharp contrast

- Three 1.0" EPSON high-aperture LCDs for evenly distributed color across the screen
- XGA (1024 x 768) resolution for sharp, vivid detail
- 700:1 contrast ratio for blacker blacks and whiter whites



Easy installation, setup and operation

- Multiple lens options
- Image corrections tools for flexible setup and installation
 - Keystone (40° vertical, 20° horizontal)
 - QuickCorner for aligning images projected on a corner
 - WallShot for color correction on a colored surface
- Short throw distance (5.25'/60") for placement closer to the screen

- Preview function with seven convenient SnapWindows™
- Monitor out capability for simultaneous viewing on a monitor and screen
- Easy-to-use remote control/control panel
 - Manage the setup and installation process, picture-in-picture capability, and more
 - Operate multiple projectors simultaneously
- ASCII-based RS-232 communication
- Various inputs including D-Sub15, BNC, DVI, S-Video, and Video
- Low fan noise for undisturbed presentations
- Security function that protects your projector
- Start Here Kit gets first time users projecting in just minutes

Renowned EPSON service and support (free for the duration of the warranty)

- Comprehensive two-year warranty
- 90-day bulb warranty for added dependability
- EPSON Road Service Program provides a replacement projector, typically within 24 hours
- EPSON PrivateLine™ dedicated toll-free support line available from 6 a.m. to 6 p.m. PST Monday – Friday (Calls are answered live, typically in about a minute.)
- International warranty in over 45 countries

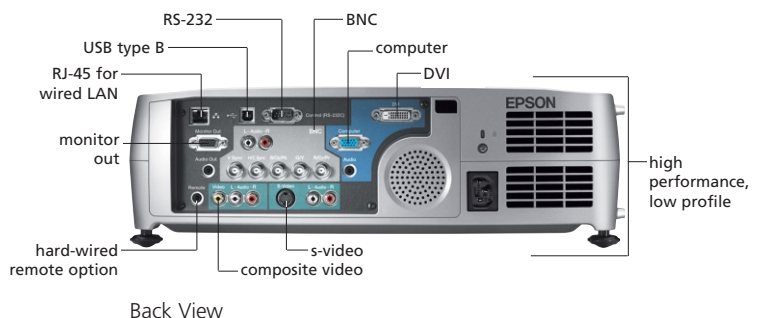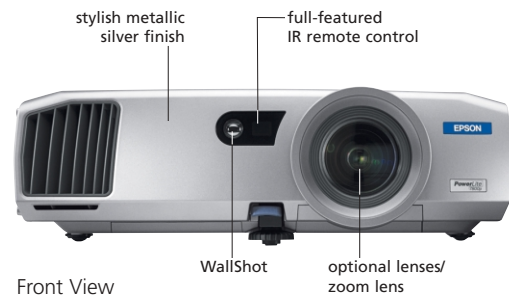

EPSON PowerLite 7800p Specifications

Projection System	EPSON original LCD prism technology	
Projection Method	Front/rear/ceiling mount	
LCD		
Size	1.0 inches	
Driving method	EPSON Poly-silicon TFT Active Matrix	
Pixel number	786,432 pixels x 3 (1024 x 768) LCDs	
Native resolution	XGA	
Aspect ratio	4:3 (supports 16:9; 5:4)	
Pixel arrangement	Stripe	
Projection Lens		
Type	Manual zoom/focus	
F-number	1.7 to 2.3	
f-number	28 to 37mm	
Zoom ratio	1.0:1.35	
Lamp		
Type	250W UHE	
Life (typical)	2000H (High Brightness)	
Screen Width Ratio: (Distance/Width)	1.32 to 1.8:1	
Screen Size (Projected Distance)	30" to 300" (2.6' to 36.1')	
Keystone Correction	Vertical: ±40 degrees, Horizontal: ±20 degrees Auto Keystone Correction (Vertical only)	
Brightness (typical)	3500 ANSI lumens, 2500 ANSI lumens (Low Brightness)	
Contrast Ratio	700:1	
Brightness Uniformity (typical)	90%	
Color Reproduction	24 bit; 16.7 mil	
Audio Output	5W Monaural	
Operating Temperature	41°F to 95°F (5°C to 35°C)	
Power Supply Voltage	100-120V/200-240V ±10%, 50/60Hz AC	
Power Consumption	350W, 47W at sleep mode: Network ON 1.5W at sleep mode: Network OFF	
Dimension (includes lens and feet)	12.8" x 16.5" x 5.4"	
Dimension (excludes lens and feet)	12.8" x 16.5" x 4.6"	
Weight	12.1 lb/5.5kg	
Fan Noise	36db (High Brightness), 33db (Low Brightness)	
Effective Scanning Frequency Range		
<i>Analog</i>		
Pixel Clock	13.5MHz to 230MHz	
Horizontal	15KHz to 107KHz	
Vertical	50Hz to 120Hz	
<i>Digital</i>		
Pixel Clock	25MHz to 135MHz	
Horizontal	15KHz to 80KHz	
Vertical	50Hz to 85Hz	
Remote Control Features		
Features	Keystone, brightness, source selection, power, PinP, preview, page up/page down, color mode, volume, presets, e-zoom, a/v mute, freeze, effects	
Operating angle	Right/Left ± 30 degrees Upper/Lower ± 15 degrees	
Operating distance	33 ft (10m)	
RGB		
	Analog RGB I/O	Digital RGB Input
Display performance		
Native	1024 x 768	1024 x 768
Resize	1600 x 1200 1280 x 1024 800 x 600 640 x 480	1280 x 1024 800 x 600 640 x 480
Input terminal		
Video	Mini D-sub 15 pin x 1 5-BNC x 1	DVI TypeD x1
Audio	Stereo mini jack (for Mini D-sub), RCA x 2 (for 5BNC)	Stereo mini jack

RGB (cont.)	Analog RGB I/O	
Output terminal		
Video	Mini D-sub 15pin (monitor out) x1	
Audio	Stereo mini jack	
Video I/O		
Display performance	NTSC: 560 line PAL: 560 line (Depends on observation of the multi burst pattern)	
Input signal	NTSC/NTSC4.43/PAL/M-PAL/ N-PAL/PAL60/SECAM HDTV: 480i, 480p, 720p, 1080i	
Input terminal		
Video	Composite video: RCA(Yellow) x 1 S-Video: Mini DIN Component video: Mini D-sub 15pin (in common with Analog RGB connector) Video-RGB: Mini D-sub 15pin (in common with Analog RGB connector)	
Audio	RCA(White/Red) x 2	
Audio signal	500m Vrms/47Kohm	
Control I/O		
USB I/O	USB connector series B x 1 (for mouse, keyboard)	
Serial I/O	Mini D-sub 9pin x 1 RS-232C	
Network interface	RJ45 x 1	
Security	Kensington®-style lock provision	
Warranty	Two year limited warranty, 2-year international warranty, 90-day lamp warranty, EPSON Road Service Program and EPSON PrivateLine dedicated toll-free support (U.S. and Canada only)	
Supplied Accessories	Power cable, remote control, 2 AA batteries, computer cable, audio cable, USB mouse cable, RCA Video Cable, RCA Audio Cable, CD-Rom (Windows-based EasyManagement software, Start Here Kit.	
Product/Accessory Part Numbers		
EPSON PowerLite 7800p Projector	V11H119020	
Replacement lamp	V13H010L22	
Air filter set ELPAF01	V13H134A01	
Middle throw zoom lens ELPLM03	V12H004M03	
Long throw zoom lens ELPLL05	V12H004L05	
Remote control cable set ELPKC28	V12H005C28	
Ceiling mount	ELPMB40	
Suspension adapter	ELPMBAPL	
False ceiling plate	ELPMBFCP	
Distribution amplifier	ELPDA01	
Digital video cable DVI to DVI, 3m	ELPKC20	
Digital video cable DVI to DFP, 3m	ELPKC21	
S-video cable	ELPSV01	
Mac adapter set	ELPAP01	
ATA shipping case	ELPKS46	
ATA molded hardshell case	ELPKS48	
50" portable screen	ELPSC06	
60" portable pop-up screen	ELPSC07	
80" portable pop-up screen	ELPSC08	
High resolution document imager	ELPDC02	
High resolution document camera	V12H064020	
Kensington security lock	ELPSL01	
Support—The Epson ConnectionSM		
Pre-Sales Support U.S. and Canada	800-463-7766	
Automated Technical Support	800-922-8911	
Internet Web Site	www.epson.com	
Presenters ONLINESM	presentersonline.com	



Epson America, Inc.
3840 Kilroy Airport Way, Long Beach, CA 90806

Epson Canada, Ltd.
550 McNicoll, Willowdale, Ontario M2H 2E1

Epson Latin America
6303 Blue Lagoon Drive, Miami, FL 33126

Specifications and terms are subject to change without notice. EPSON is a registered trademark and EasyManagement, SnapWindows, WallShot and QuickCorner are trademarks of Seiko Epson Corporation. PowerLite is a registered trademark, SizeWise is a trademark and EPSON Connection, PrivateLine and Presenters Online are service marks of Epson America, Inc. All other product and brand names are trademarks and/or registered trademarks of their respective companies. Epson disclaims any and all rights in these marks. © Copyright 2003 Epson America, Inc. CPD-15818 25K 4/03 WP