


Make sure your EPSON® PowerLite® projector and computer are turned off. Then follow these steps:

## Connecting to a PC Laptop




1

Connect one end of the projector video cable to the projector's Computer 1 port.



2

Connect the other end of the video cable to the laptop's monitor port.



3

Connect the power cord to the projector.


If you want to use the remote control as a mouse, see below.  
If not, just follow the steps in "Using Your Projector" (see other side).

### Optional Connections

To use your remote control as a mouse or to use audio, follow these steps:


1

Connect the round end of the main cable to the projector's Mouse/Com 1 port.

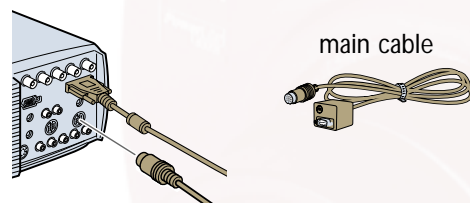


2

Connect the PS/2 or USB cable to the MOUSE terminal on the main cable.




3

Connect the other end of the PS/2 or USB cable to the mouse or USB port on your laptop.

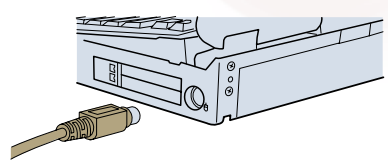

4


To use audio, connect one end of the audio cable to the projector's Audio 1 jack and the other end to your laptop.

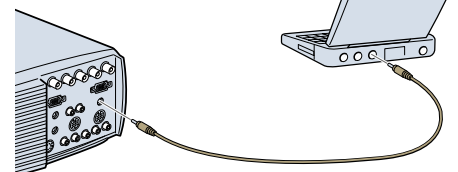

## Connecting to a Macintosh® PowerBook®


1

Connect one end of the projector video cable to the projector's Computer 1 port.




2

Connect the small terminal of the desktop adapter to the other end of the projector video cable. (Be sure the desktop adapter DIP switches are set correctly for the resolution you want. See your PowerBook manual.)



3

Connect the projector video cable (with Macintosh desktop adapter attached) to the video-out port of your PowerBook.

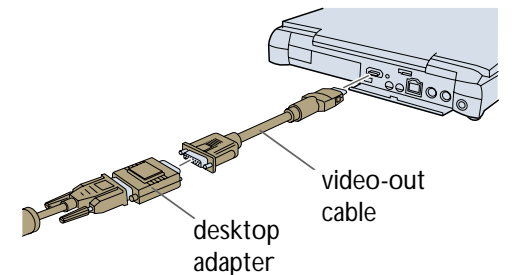

**Note:** If your PowerBook requires a video-out cable (not included), connect the smaller end of the cable to the video-out port on the back of the PowerBook. Then connect the other end to the desktop adapter.

4

Connect the power cord to the projector.


If you want to use the remote control as a mouse, see below.  
If not, just follow the steps in "Using Your Projector" (see other side).

### Optional Connections

To use your remote control as a mouse or use audio, follow these steps:


1

Connect the round end of the main cable to the projector's Mouse/Com 1 port.

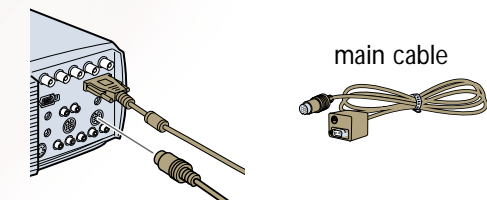


2

Connect the Mac or USB cable to the MOUSE terminal on the main cable.




3

Connect the other end of the Mac or USB cable to the mouse or USB port on your PowerBook.



4


To use audio, connect one end of the audio cable to the projector's Audio 1 jack and the other end to your PowerBook.

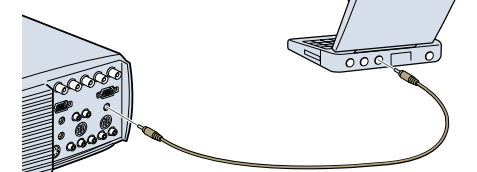


# Projector at a Glance

EPSON PowerLite 8000i  
EPSON PowerLite 9000i

## Using the Control Panel

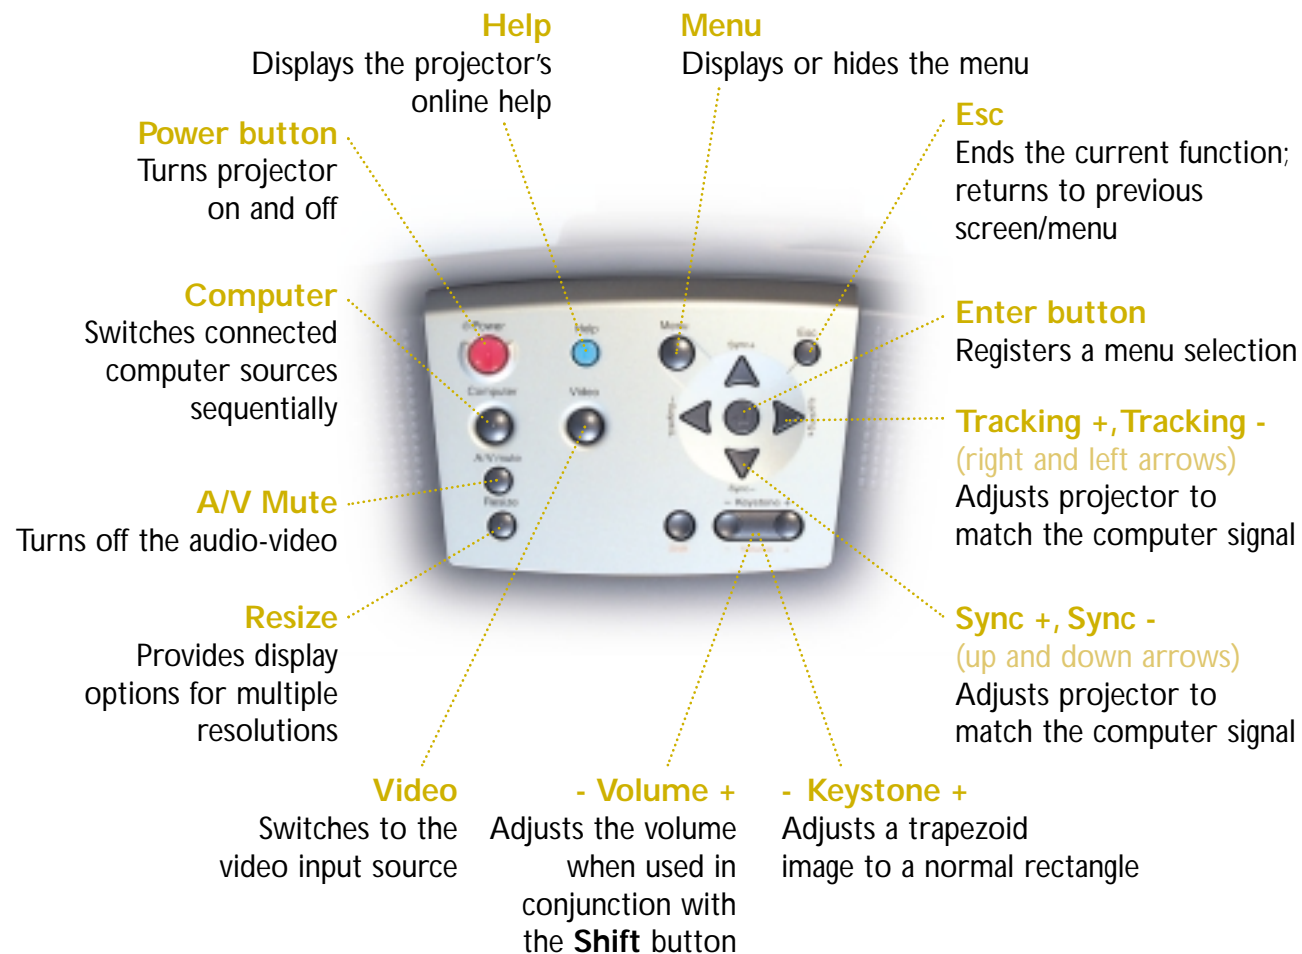

## Using the Remote Control

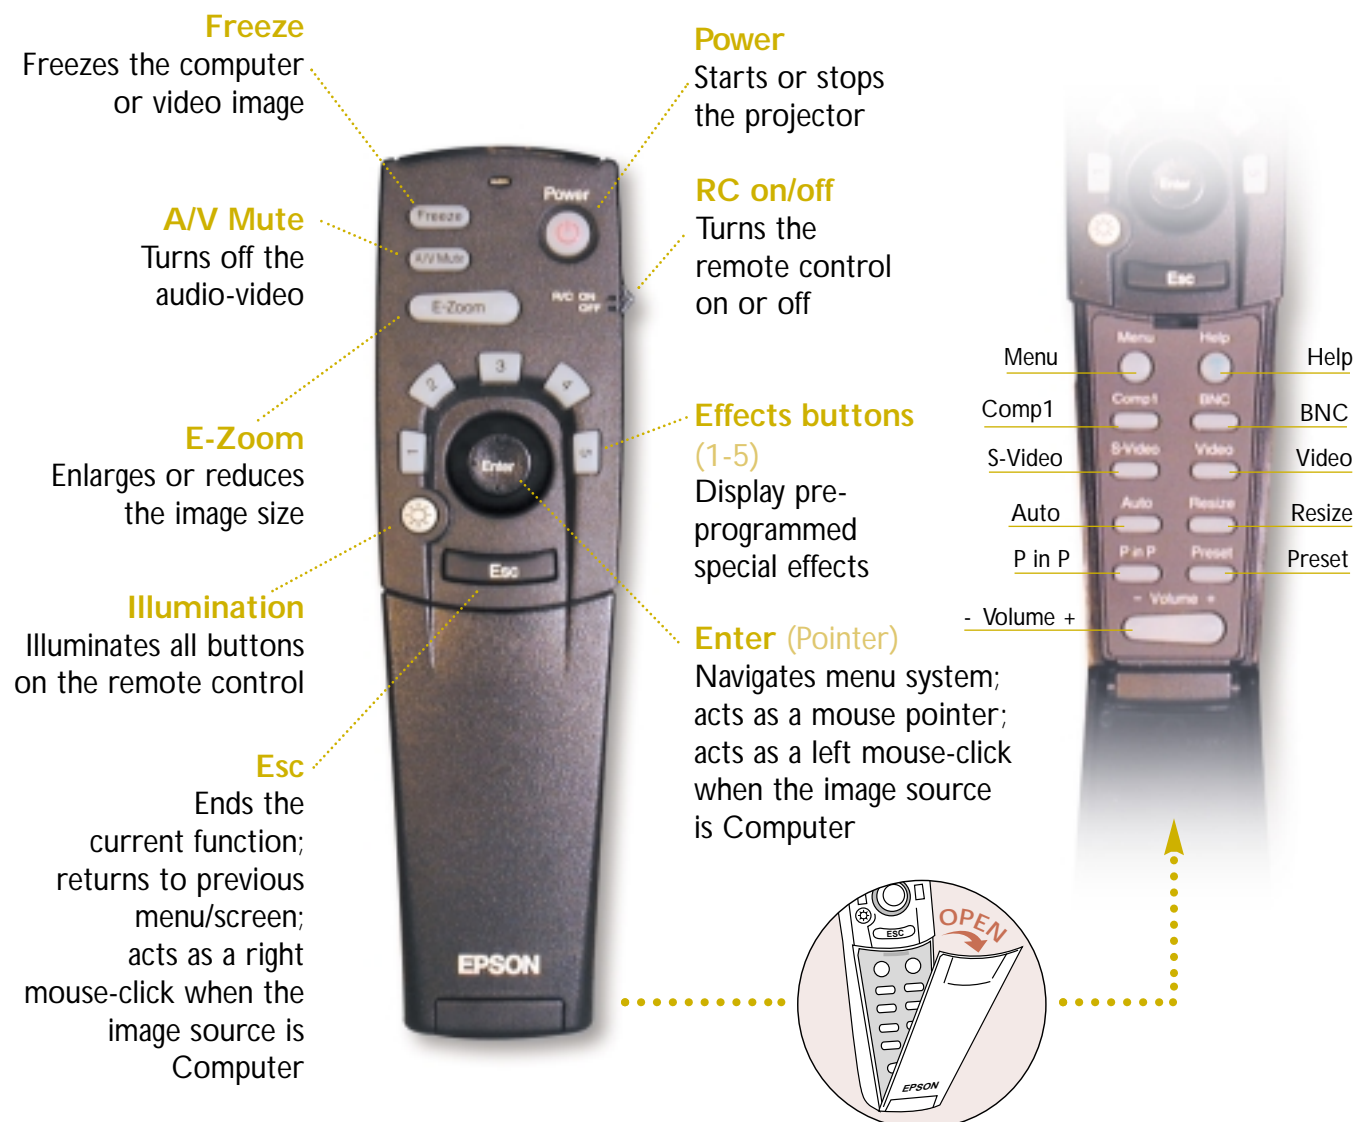

## Using Your Projector

1. Plug in the projector. The power light on the projector's control panel turns orange. (The projector is not on yet.)
2. Remove the lens cap.
3. Press the **Power** button on the control panel or remote control **once** to turn on. The power light flashes green as the projector warms up. Then turn on your computer.

**Warning: Never look into the lens when the lamp is on.**

4. You can set the display to appear on both the computer's screen and the projector. Check your computer manual for instructions.
5. To adjust the projected image size, rotate the zoom (outside) ring on the projector. For larger adjustments, you may need to reposition the projector closer to or farther from the screen.
6. To focus the image, rotate the focus (inside) ring.
7. If the image is too high or low, lift up the foot adjust levers to raise or lower the adjustable feet. Release the levers to lock the feet in place.
8. When you want to stop projecting images, press the **Power** button again. The projection light flashes orange as the projector cools down. When you are done, make sure the projection light has stopped flashing and then unplug the power cord.

**Caution: Never unplug the power cord when the power light is green; this may damage the lamp.**

For instructions on setting up your projector with a desktop computer or for information on using the ELP Link IV software to control the projector, see your User's Guide.