

POS Menu Routing

About this guide:

This guide consists of 2 sections:

- **Overview-** A detailed description of what POS Menu Routing is and its functionality.
- **How to Configure POS Menu Routing function** – A procedure to be followed within a Multi-Station KDS Setup. This guide assumes that you have a Multi-Station setup as described by the Epson Multi-Station Quick Start Manual.

This guide is relevant for:

KDS FW: **v2.50 and above**

KDS Utility (Windows): **v2.5.0.0 and above**

Overview

The POS Menu Routing function allows all print jobs to be sent from the POS directly to their intended display stations over the network. Thus, the POS determines which items are sent where and all menu management remains on the POS.

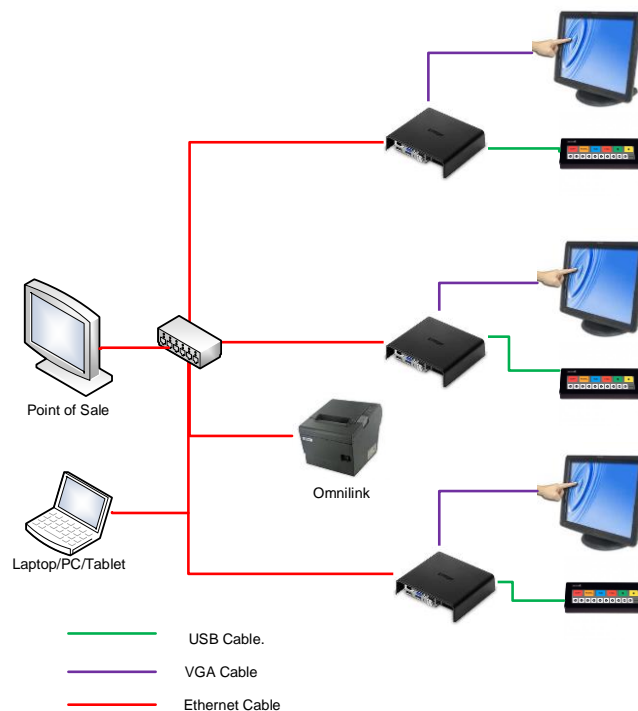


Figure 0.1 - Sample Multi Station Setup – POS Menu Routing

How to Configure POS Menu Routing

Step 1: How to Configure

1. Select **Setup** configuration.
2. Under **Site Wide Settings** ensure that your **POS Connected Device** (the Master Printer or Controller in your setup) is selected.
3. Select **POS Menu Routing** from the Menu Routing Drop Box.
4. **Apply KDS Settings**

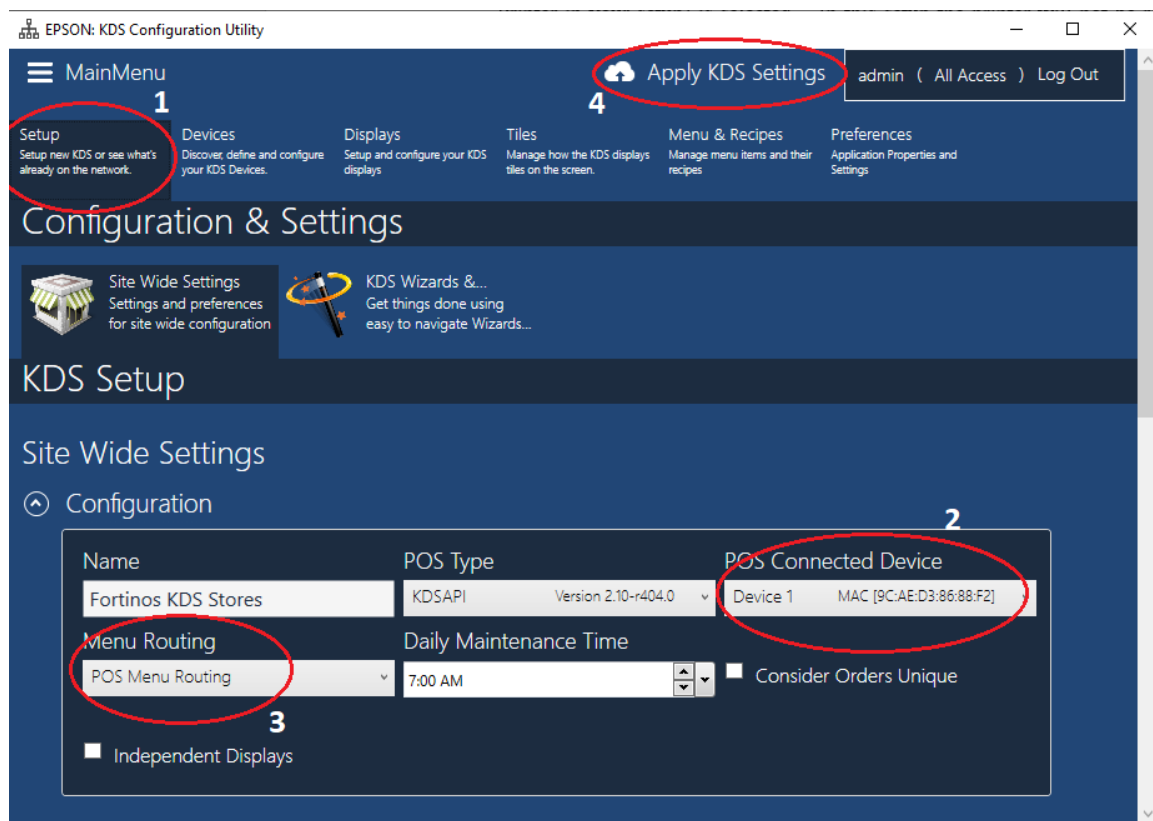


Figure 1.1 – Configure Site Wide Settings

The POS needs to be configured to send the print jobs directly to the display stations. Of course, how this is configured depends on the POS and is not possible with all POS systems. Please check with your POS supplier.