

Mirrored Displays

About this Guide

This guide consists of two sections:

- **Overview:** A brief description of what a mirrored display is.
- **How to Configure:** A procedure that can be followed to configure this in a Multi-Station KDS system. This guide assumes that you already have a 2 Station KDS system setup as described in the Epson KDS Multi-Station Quick Start Guide.

This guide is relevant for:

KDS FW: v2.50 and above

KDS Utility (Windows): v2.5.0.0 and above

Overview

A Mirrored Display is a display that shows the exact same information as another display or displays. All displays will show the exact same information and bumping from one display will cause the item to be bumped off and disappear from the other(s).

Kitchen		Kitchen	
0	1	0	1
1 Chicken Sandwich Pickles Extra Mayo Tomatoes Extra Onions 1 POP	2 Ham Sandwich Extra Ketchup Onions Lettuce Extra Mustard 1 Salad 2 Coffee Extra Sugar Cream Large	1 Chicken Sandwich Pickles Extra Mayo Tomatoes Extra Onions 1 POP	2 Ham Sandwich Extra Ketchup Onions Lettuce Extra Mustard 1 Salad 2 Coffee Extra Sugar Cream Large
3 Cheeseburger Extra Ketchup Extra Onions Lettuce Mustard 1 Classic Hamburger Tomatoes Extra Mayo Onions Lettuce Mustard 1 POP 3 French Fries	4 Classic Hamburger Onions Lettuce Mustard 1 Cheeseburger Pickles Extra jalapenos Tomatoes Extra Ketchup Extra Onions 1 Salad 2 POP	3 Cheeseburger Extra Ketchup Extra Onions Lettuce Mustard 1 Classic Hamburger Tomatoes Extra Mayo Onions Lettuce Mustard 1 POP 3 French Fries	4 Classic Hamburger Onions Lettuce Mustard 1 Cheeseburger Pickles Extra jalapenos Tomatoes Extra Ketchup Extra Onions 1 Salad 2 POP
5 Steakhouse Smith Thu 1 Ck# 0126	6 Steakhouse Smith Thu 1 Ck# 0127	5 Steakhouse Smith Thu 1 Ck# 0126	6 Steakhouse Smith Thu 1 Ck# 0127
1 Chicken Sandwich Pickles Mayo Tomatoes Extra Onions Lettuce 1 POP 1 Coffee Sugar Extra Cream Medium	2 Veggie Burger Pickles Extra Tomatoes Extra Onions Extra Lettuce 1 Ham Sandwich Extra jalapenos Extra Tomatoes Onions Lettuce 2 POP 2 Tea Sugar Medium	1 Chicken Sandwich Pickles Mayo Tomatoes Extra Onions Lettuce 1 POP 1 Coffee Sugar Extra Cream Medium	2 Veggie Burger Pickles Extra Tomatoes Extra Onions Extra Lettuce 1 Ham Sandwich Extra jalapenos Extra Tomatoes Onions Lettuce 2 POP 2 Tea Sugar Medium

Figure 0.1 – Screens from Device 1 and Device 2 are the same

How to Configure Mirrored Displays

This procedure assumes that you already have a 2 Station KDS system setup as described in the Epson KDS Multi-Station Quick Start Guide. However, these same steps would need to be applied for setting up a mirrored display in any Multi-Station KDS.

Step 1: Assign Display to Device 1

1. Select **Devices**.
2. Choose “**Device 1**”.
3. Select the **Display** (e.g. Kitchen) you want to mirror in **Display Manager**.

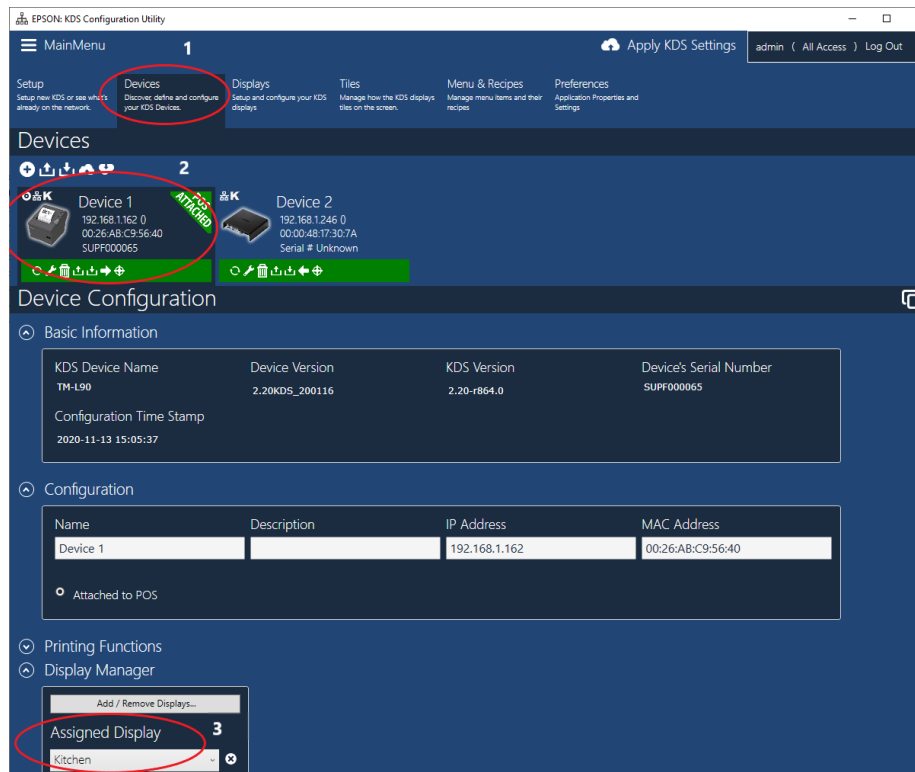


Figure 1.1

Step 2: Assign Same Display to Device 2

1. Select “Device 2”.
2. Choose the same **Display** (Kitchen) as “Device 1” in **Assigned Display**.
3. Click “Apply KDS Settings”.

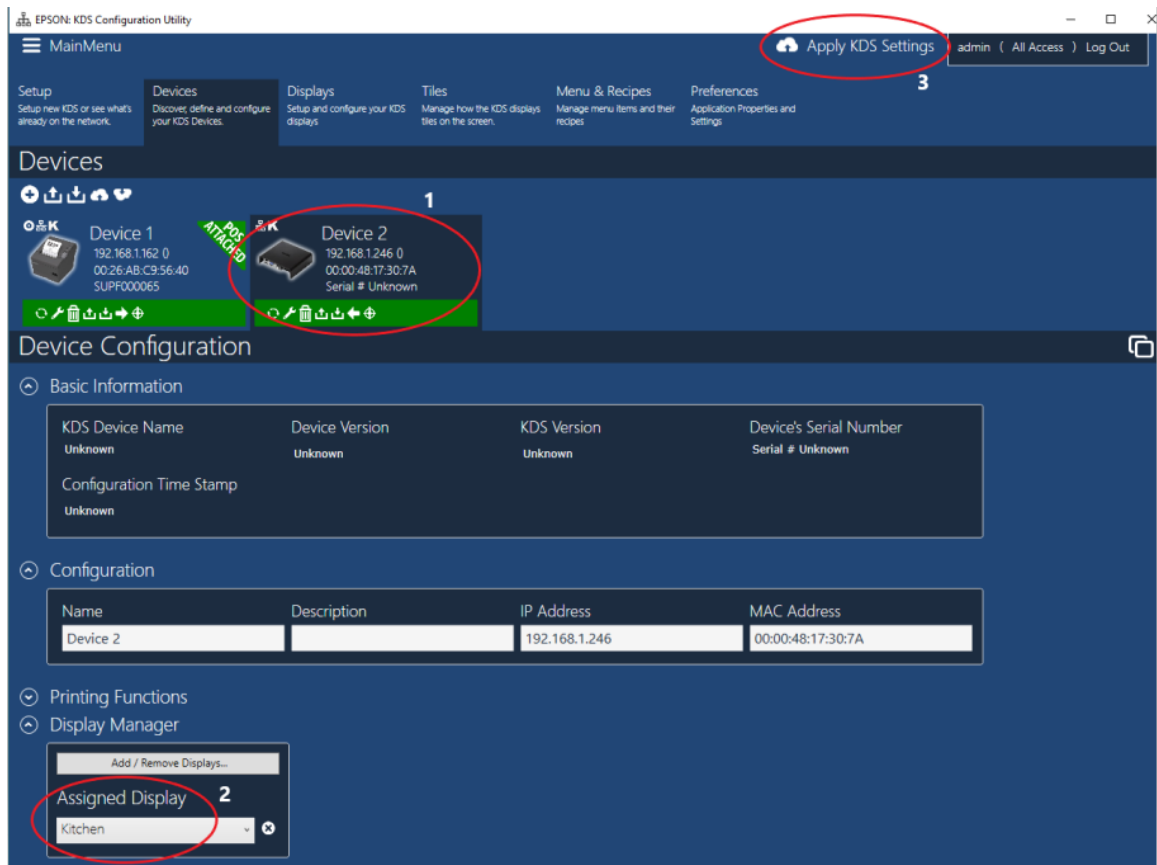


Figure 2.1

4. The new configuration will be uploaded to the system. Click **OK**.

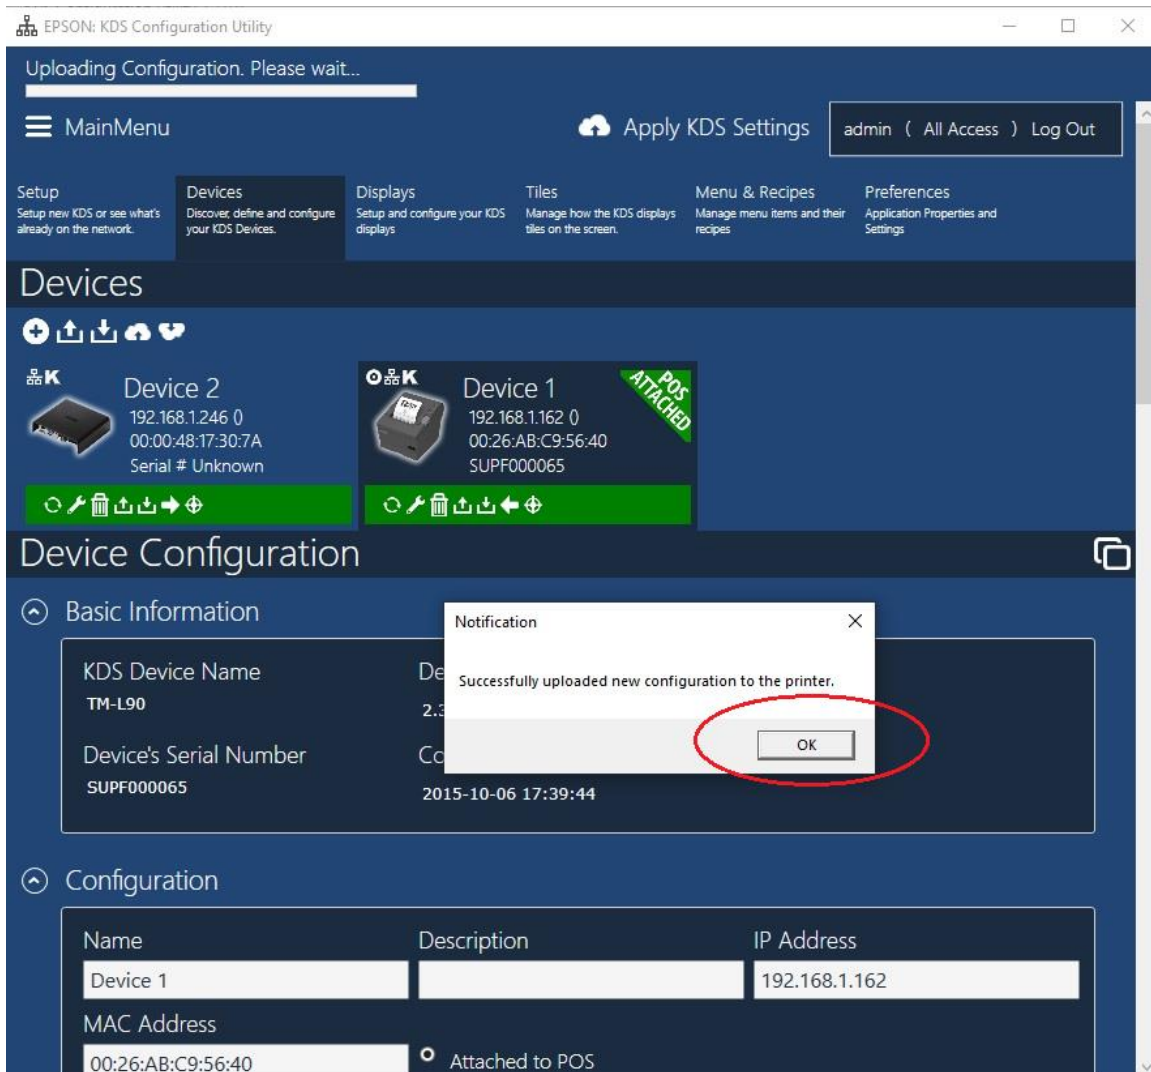


Figure 2.2 – Configuration Successfully Uploaded

The displays attached to each device now will show the exact same information and react to bump or touch presses from either station.