

Station Print Only

About this Guide

This guide consists of 2 sections:

- **Overview** – A detailed description on what the KDS Station Print Only feature is in a TrueOrder™ Kitchen Display System (KDS).
- **How to Configure** - A procedure that can be followed to configure this within a Single or Multi-Station KDS system.

Overview

A printer at a display station has the capability of bumping and printing the order or items in that order, creating a label. It may be desirable to have this order printed immediately from a KDS station when received. For example, if the items at that station are already prepared and simply require a label. Enabling the “Station Print Only” function in a KDS display accomplishes this. The KDS station then does not need a display attached nor a bump bar. An order sent to it will be automatically bumped off and printed when received.



Epson TM-L100 LFC
Label Printer




Epson TM-L90II LFC
Label Printer

How to Configure


This guide assumes that you have a Multi-Station setup as described in the TrueOrder Multi-Station Quick Start Guide. However these instructions can be followed to configure this in any KDS configuration.

1. Enable Station Print Only


1. Click the **Stations** tab.
2. Click the **Stations** side menu option.
3. Select the Station that you want to configure.

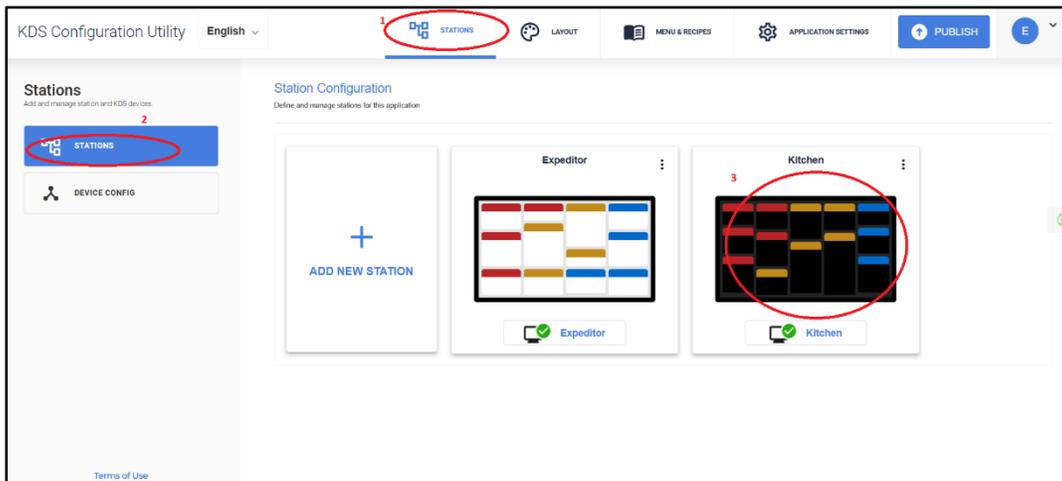

4. Click the pencil icon beside **Station Type**.

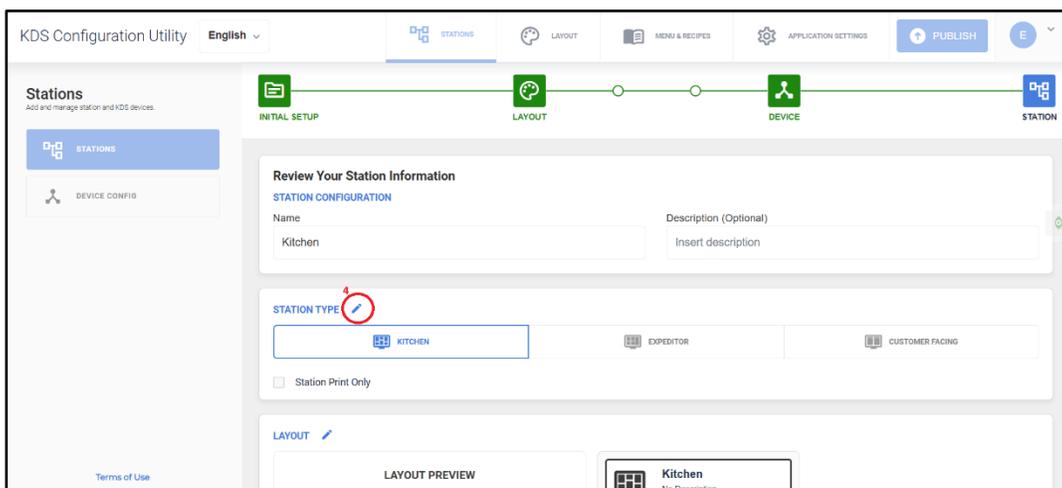


5. Enable **Station Print Only**.
6. Click **Finish**.

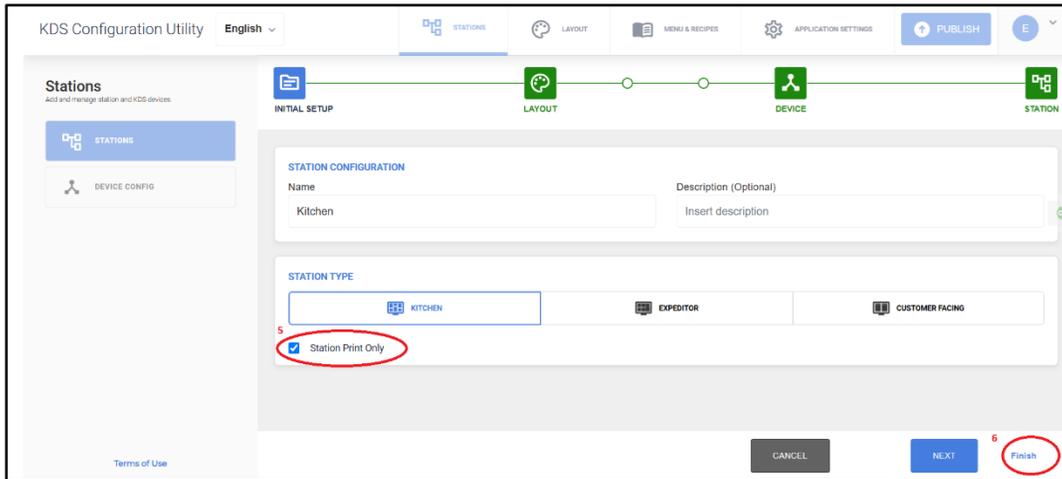


2. Enable Print Functions

1. Click the **Stations** tab.
2. Select **Device Config**.
3. Select the device associated with '**Station Print Only**' (Kitchen Device used as example).

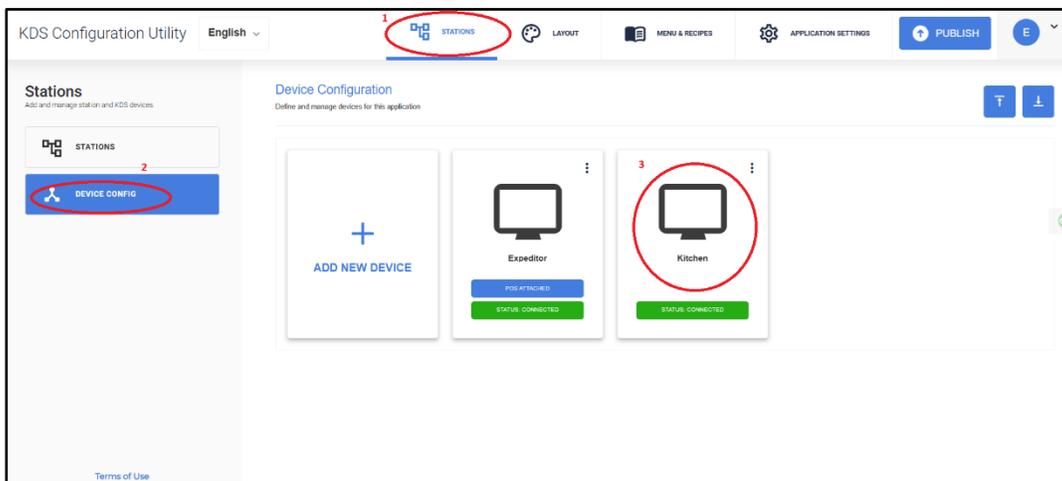

4. Enable **Print Functions** – Print Ticket on Bump.
5. Click **Save**.
6. Click **Publish**.

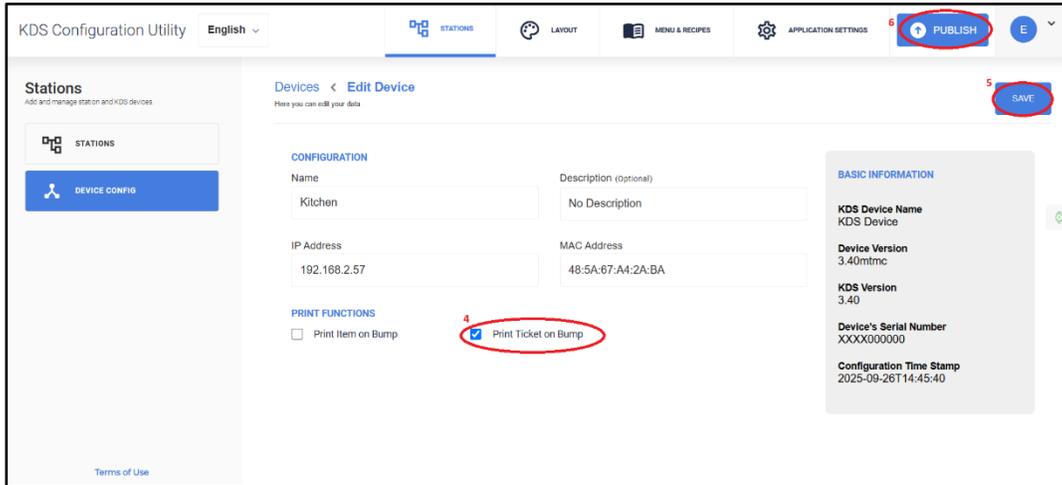

The printer at that station will now automatically bump and print an order ticket immediately for every incoming order.